
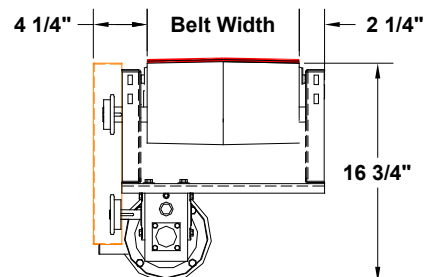
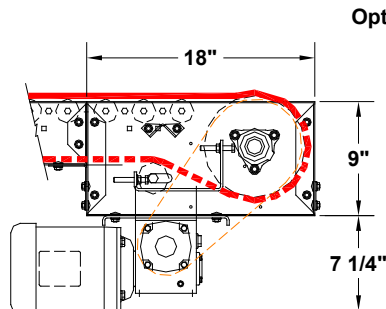
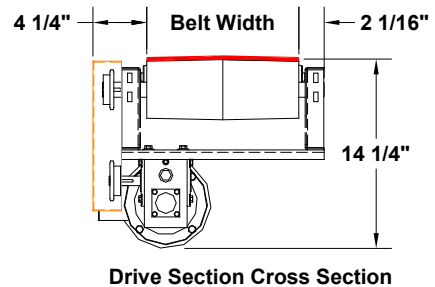
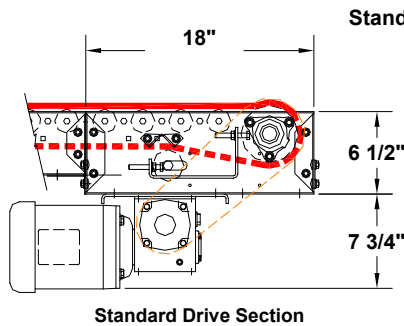
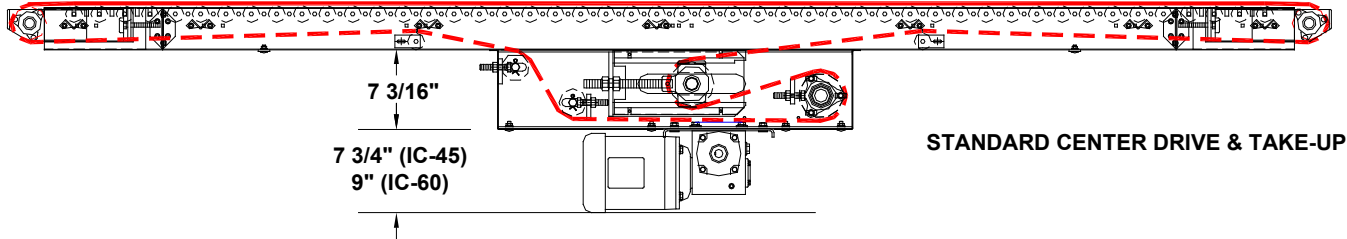
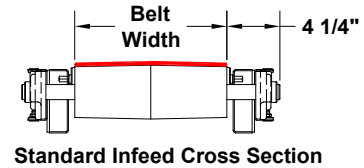



MODEL 105

ROLLER BED

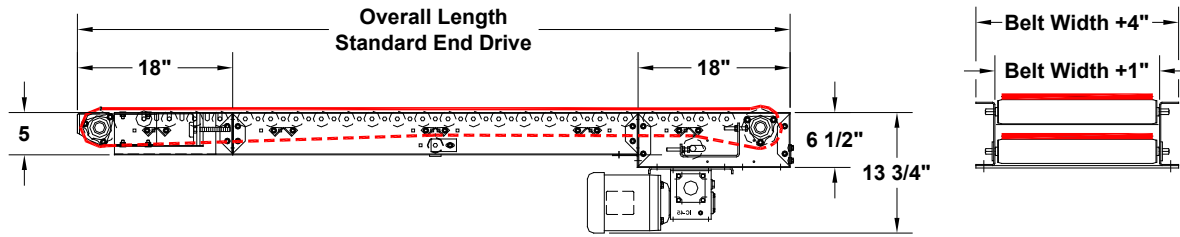

735 Industrial Loop Road • New London, WI 54961-9612 • 920-982-6600 • Fax 920-982-7750 • Toll Free 800-558-3616

Website: www.titanconveyors.com • Email: sales@titanconveyors.com

TITANTM

INDUSTRIES, INC.

MODEL 105 ROLLER BED



When the application demands using rollers to decrease the friction factor, consider using the Titan Model 105 Roller Bed Belt Conveyor. The roller bed design allows you to carry heavier loads than a standard slider design. The Model 105 Roller Bed Belt Conveyor is offered with either a 4" or 9" diameter crown face rubber lagged drive pulley based on the load requirements. Model 105 Roller Bed Belt Conveyors use 4" diameter pulleys (lagged drive), 1.9" diameter x 16 gauge rollers with 7/16" hex axle. Standard roller centers are 6" but can be varied to suit your application. Model 105 Conveyors are designed to be compatible with other Titan Conveyors to allow you flexibility when designing your handling system.

MODEL 105 SPECIFICATIONS

DRIVE:	1/2 H.P. 230/460/3/60
BELT SPEED:	60 F.P.M.
BELT:	Black PVC
FRAME:	Formed 12 Gauge
PULLEYS:	4" Diameter Crown Face Rubber Lagged Drive 8" Diameter Drive Optional 4" Diameter Crown Face Take-up
BEARINGS:	Grease Sealed
SUPPORTS:	"H" Type Adjustable
PAINT:	One Coat Industrial Enamel

NOTE: Specifications subject to change without notice