


MODEL 304

PARTS CONVEYOR



	45° Decline		24°-29° Decline		Horizontal		16° Decline	
	Max. Dr.	Min. In.	Max. Dr.	Min. In.	Max. Dr.	Min. In.	Max. Dr.	Min. In.
4 Ft.	35 3/4"	5 1/4"	28"	(29°) 7 1/4"	34 3/4"	35"	25 1/4"	36 3/4"
6 Ft.	52 1/2"	5 1/4"	39 1/4"	(29°) 6 3/4"	46 3/4"	46 3/4"	31 1/2"	49 1/2"
8 Ft.	69 1/2"	5 1/4"	49 1/4"	(28°) 6 1/2"	60 1/4"	60 1/4"	38"	63 3/4"
10 Ft.	86 1/2"	5 1/4"	56 1/2"	(24°) 9"	77 1/4"	77 1/4"	-	-
12 Ft.	103 1/2"	5 1/4"	66 1/4"	(24°) 9"	77 1/4"	77 1/4"	-	-

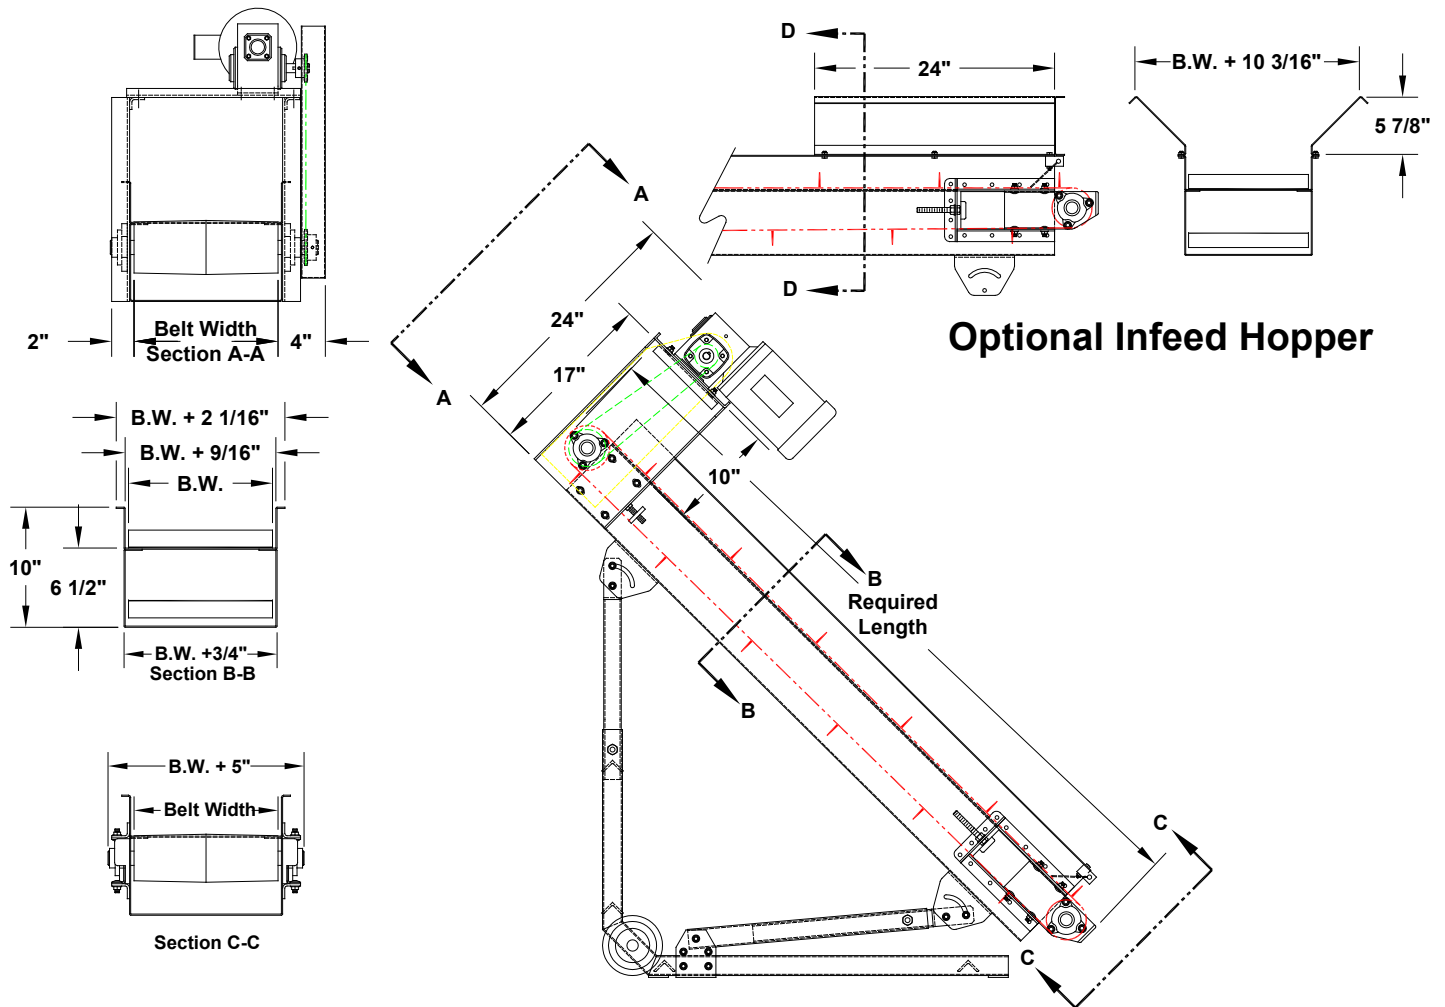

735 Industrial Loop Road • New London, WI 54961-9612 • 920-982-6600 • Fax 920-982-7750 • Toll Free 800-558-3616

Website: www.titanconveyors.com • Email: sales@titanconveyors.com



MODEL 304 PARTS CONVEYOR



The rugged Model 304 Titan Parts Conveyor is designed to handle various types of products. The Model 304 allows you to convey and elevate product from one machine to another. The Model 304 is offered in seven belt widths with standard units up to twelve feet long. The standard frame design incorporates 3 1/2" high siderails and an enclosed bottom pan for the belt return. The adjustable undercarriage allows for a variety of adjustments at both the infeed and discharge. Options such as infeed hopper, adjustable fixed supports add to the flexibility of this unit. The adjustable undercarriage features eight inch diameter steel wheels for easy handling over rough surfaces.

MODEL 304 SPECIFICATIONS

DRIVE:	1/2 H.P. 230/460/3/60
BELT SPEED:	60 F.P.M.
BELT:	2 Ply Black Neoprene with 1 1/2" high Cleats on 12" Centers
FRAME:	6 1/2" Deep Formed 12 Gauge
PULLEYS:	4" Diameter Crown Face Rubber Lagged Drive 4" Diameter Crown Face Take-up
BEARINGS:	Grease Sealed
SUPPORTS:	Adjustable Undercarriage with 8" Diameter Steel Wheels
PAINT:	One Coat Industrial Enamel

NOTE: Specifications subject to change without notice