


# MODEL 408

## BELT-DRIVEN LIVE ROLLER CONVEYOR



735 Industrial Loop Road • New London, WI 54961-9612 • 920-982-6600 • Fax 920-982-7750 • Toll Free 800-558-3616

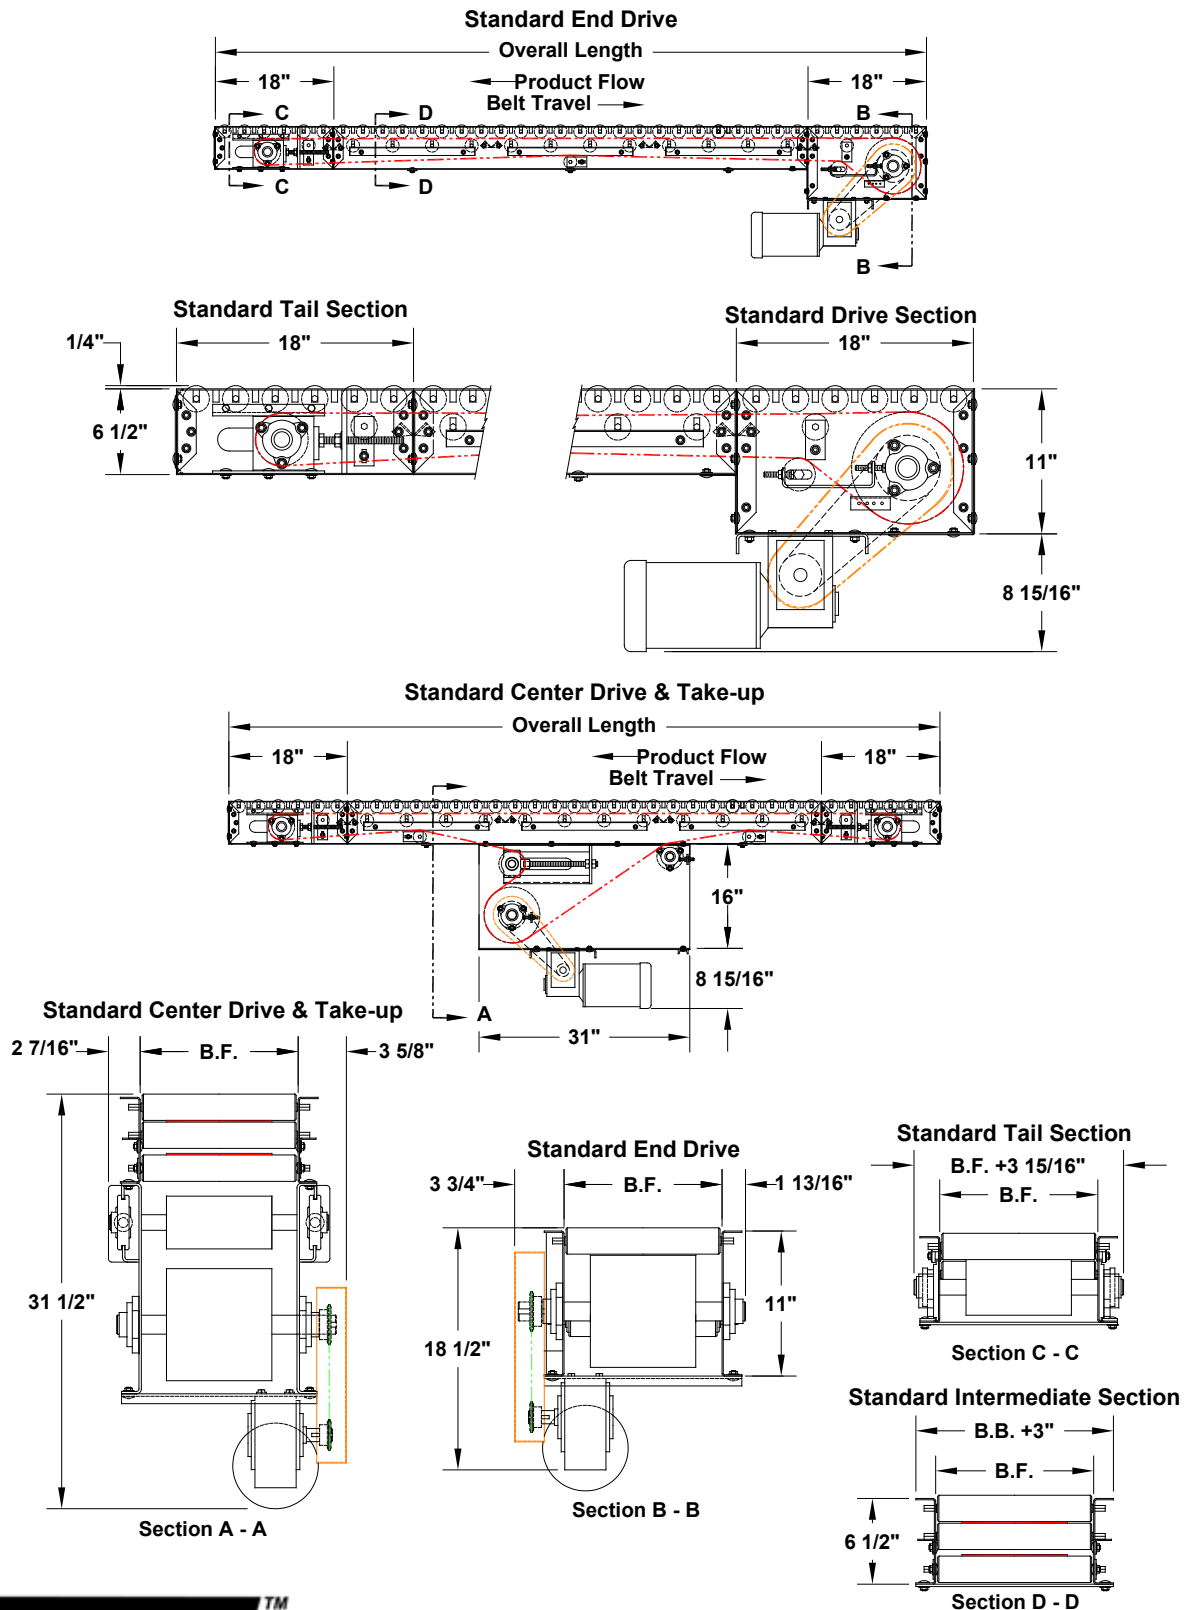

**MODEL 408**  
**BELT-DRIVEN LIVE ROLLER CONVEYOR**



When your application requirements dictate a heavier capacity Belt Driven Live Roller Conveyor, the selection should be a TITAN Model 408. The 1.9" diameter x 16 gauge rollers are mounted in a formed 12 gauge frame and have the "lift out" feature that meets most safety requirements. The Model 408 features a heavy duty 8" diameter crown face rubber lagged (vulcanized) pulley with a 1 7/16" diameter drive shaft. Compression rollers are mounted on 6" centers. The compression roller brackets are supplied in 2' increments and mounted externally for quick access. All components used in the Model 408 are designed to be compatible with other TITAN equipment for interface and systems integration.

**MODEL 408**  
**SPECIFICATIONS**

DRIVE:	1/2 H.P. 230/460/3/60
ROLLERS:	1.9" Diameter x 116 gauge
SPEED:	60 F.P.M.
FRAME:	Formed 12 Gauge
PULLEYS:	4" Diameter Crown Face Rubber Lagged Drive 4" Diameter Crown Face Take-up
BEARINGS:	Grease Sealed
SUPPORTS:	"H" Type Adjustable
PAINT:	One Coat Industrial Enamel

**NOTE: Specifications subject to change without notice**