
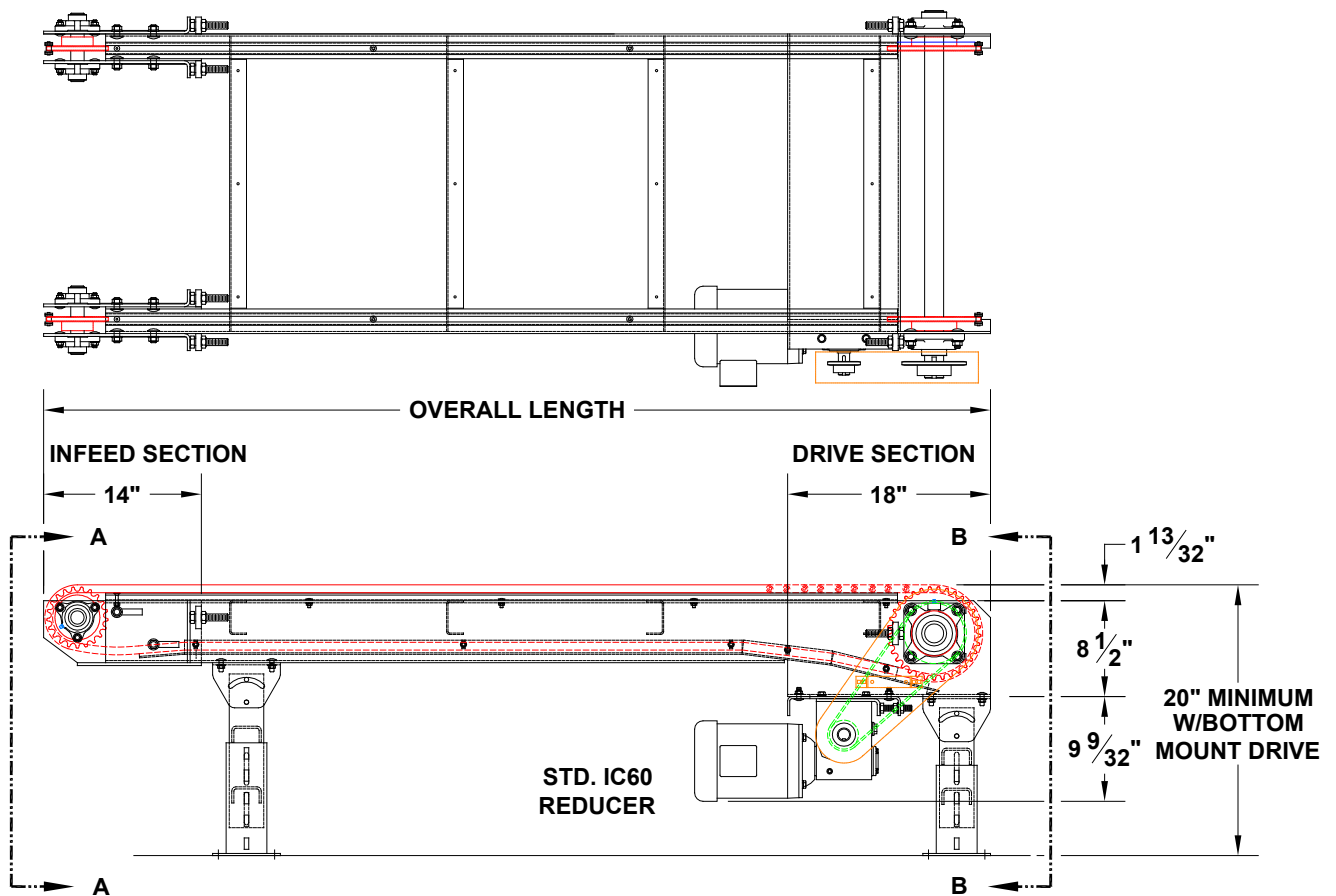


# MODEL 680

## MULTI-STRAND CHAIN CONVEYOR

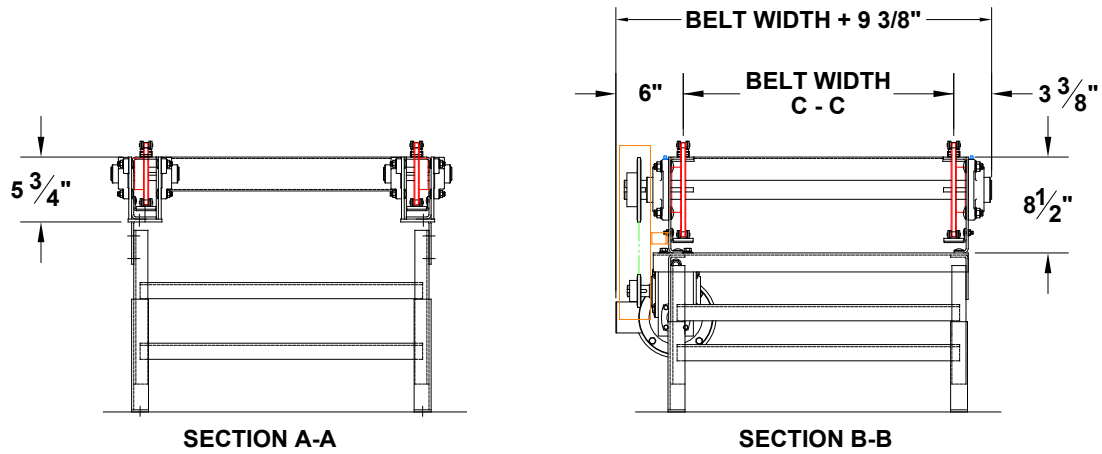

735 Industrial Loop Road • New London, WI 54961-9612 • 920-982-6600 • Fax 920-982-7750 • Toll Free 800-558-3616


Website: [www.titanconveyors.com](http://www.titanconveyors.com) • Email: [sales@titanconveyors.com](mailto:sales@titanconveyors.com)

# MODEL 680

## MULTI-STRAND CHAIN CONVEYOR



The **Model 680 Multi strand chain conveyor** is used to convey products that are not conveyable on a standard roller conveyor. The standard chain is C2060 double pitch with a load capacity of 2,400 lbs. An optional C2080 double pitch chain can be used for loads up to 4,000 lbs. Optional low profile side mounted drive and additional strands of chain can be added to increase load capacities.

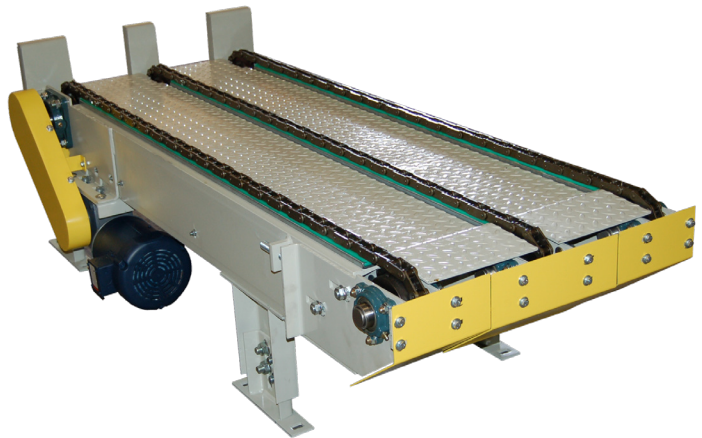

MODEL 680 MULTI-STRAND CHAIN CONVEYOR		
	Standard	Options
Chain	(2) strands of C2060	C2080, multiple strands available
Capacity	2,400 lbs	4,000 with (2) strands C2080
Drive	1 HP 230/460/3/60	Horsepower to fit application
Frame	Formed 7 ga.	Structural
Chain Speed	30 F.P.M.	Specify
<b>Optional</b>		
Drive location, HP, speed, variable speed available, controls, multiple chain strands, paint		

**NOTE: Specifications subject to change without notice**