## MODEL 118 TROUGHED BELT CONVEYOR





MODEL 118 SLIDER BED TROUGH CONVEYORS		
	Standard	Options
Belt Widths	6" to 72"	Other widths available
Lengths	5' min. to 40' max.	3' min. to 50' max.
Belt Type	PVC 120 Black	Food grade
Drive	1/2 H.P. 230/460/3/60	3/4, 1, 1-1/2, 2 HP, 115/230/1/60, TEFC, washdown, severe duty, inverter duty, brake motor
Drive Pulley	8" dia. crowned rubber lagged - 4" tail pulley	6" tail pulley for widths over 54"
Frame	4" deep formed 12 g.a.	
OPTIONAL		

OPTIONAL


H.P., drive location, speed, fixed or variable speed, controls, belt widths, belt type, center drive & take-up, galvanized, stainless, siderails, supports, casters, other belt types, siderail skirting, belt scrapper, machined and balanced pulleys for high speed, discharge housing, e-stop with pull cord, special paint


Many other options available, consult factory representative

NOTE: Specifications subject to change without notice


## MODEL 118

## TROUGHED BELT CONVEYOR

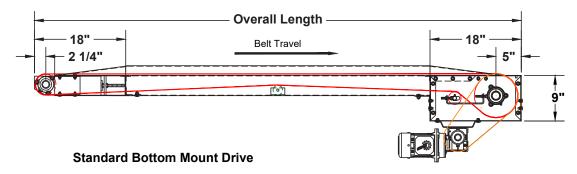




**Standard Drive Cross Section** 

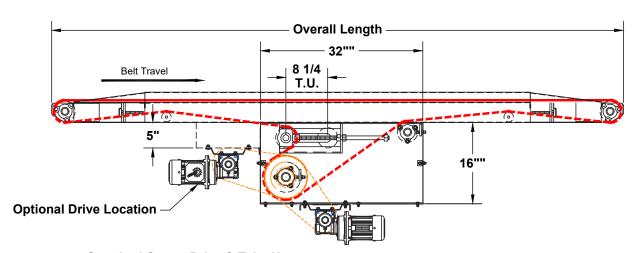

Standard Center Drive & Take-Up

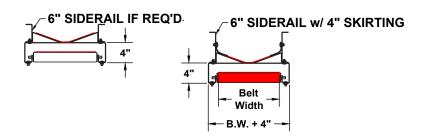



735 Industrial Loop Road • New London, WI 54961-9612
• 920-982-6600 • Fax 920-982-7750 • Toll Free 800-558-3616
Website: www.titanconveyors.com • Email: sales@titanconveyors.com