



### MODEL 124 WIRE MESH BELT CONVEYOR

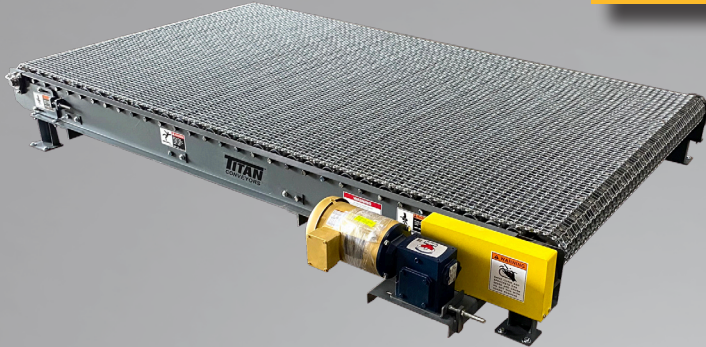


Titan offers the **Model 124 Wire Mesh Conveyor** with two styles of decks. The roller bed deck is used for heavy loads over long distances, and the longitudinal deck offers an open style for better air flow. Wear strips are furnished in steel, stainless steel or plastic depending on the application. The standard belt is 1/2" x 1" galvanized flat wire mesh with clenched selvage edge. Numerous optional types of belts are available including heavy-duty, stainless steel and balanced spiral. Wire mesh belting is ideal for handling parts that are hot, have to be washed down, dried or cleaned. Belt widths of 12", 18", 24", 30", and 36" are supplied as standard


#### BELT OPTIONS - CONSULT FACTORY



Flat Wire



Plastic



Balance Weave

#### MODEL 124 WIRE MESH BELT CONVEYOR

|                       | Standard                            | Options                                                                                     |
|-----------------------|-------------------------------------|---------------------------------------------------------------------------------------------|
| <b>Belt Widths</b>    | 8" to 48"                           | Other widths available                                                                      |
| <b>Lengths</b>        | 5' min., max. based on application  |                                                                                             |
| <b>Belt Type</b>      | 1/2" x 1" galvanized flat wire mesh | Woven wire, balanced spiral, chain edge, stainless steel, high carbon or plastic            |
| <b>Drive</b>          | 1/2 H.P. 230/460/3/60               | 3/4, 1, 1-1/2, 2 HP, 150/230/1/60, TEFC, wash-down, severe duty, inverter duty, brake motor |
| <b>Speed</b>          | Various                             | fixed speeds, variable speed                                                                |
| <b>Drive Sprocket</b> | 13 tooth, 4.4" P.D., H.D., Keyed    |                                                                                             |
| <b>Frame</b>          | Formed 10 ga. x 6 1/2" Deep         |                                                                                             |
| <b>Deck</b>           | Longitudinal steel wear strips      | Herringbone deck, roller deck                                                               |

#### OPTIONAL


H.P., drive location, speed, fixed or variable speed, controls, belt widths, deck wear strip options, cooling fans, center drive & take-up, galvanized, stainless, siderails, supports, transfer roller, bolt-on bottom pans, e-stop with pullcord, casters, special paint

**NOTE: Specifications subject to change without notice**


# MODEL 124

## WIRE MESH BELT CONVEYOR

### Roller Bed Deck

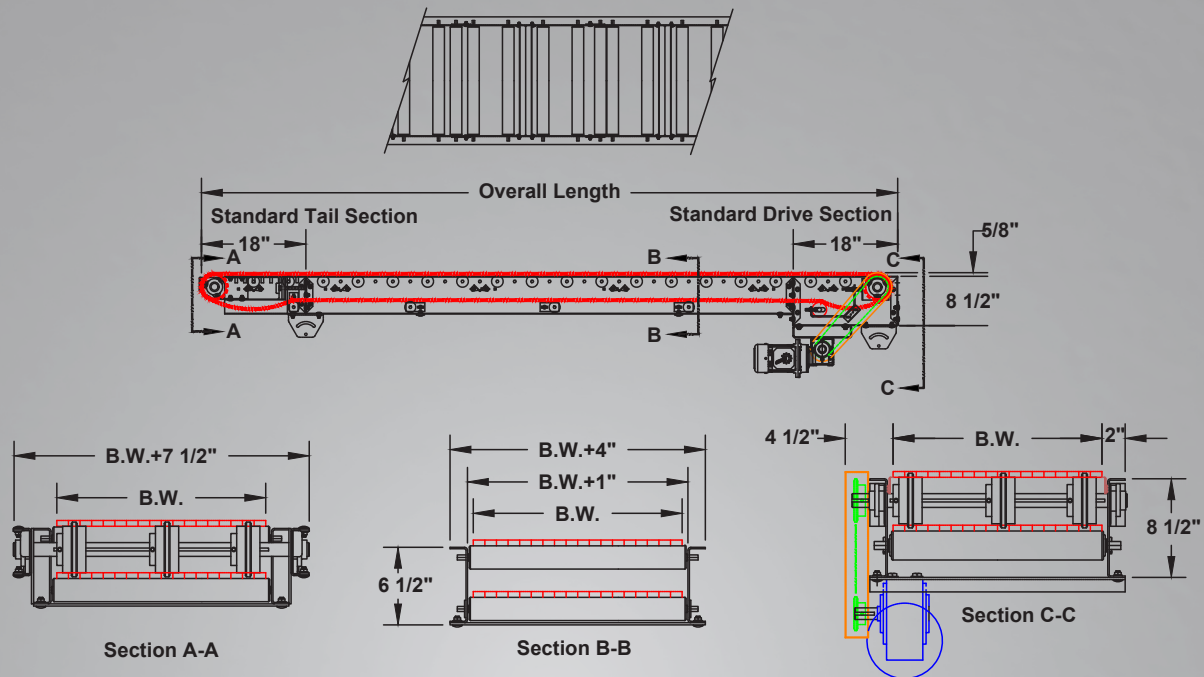

### Wear Strip Deck

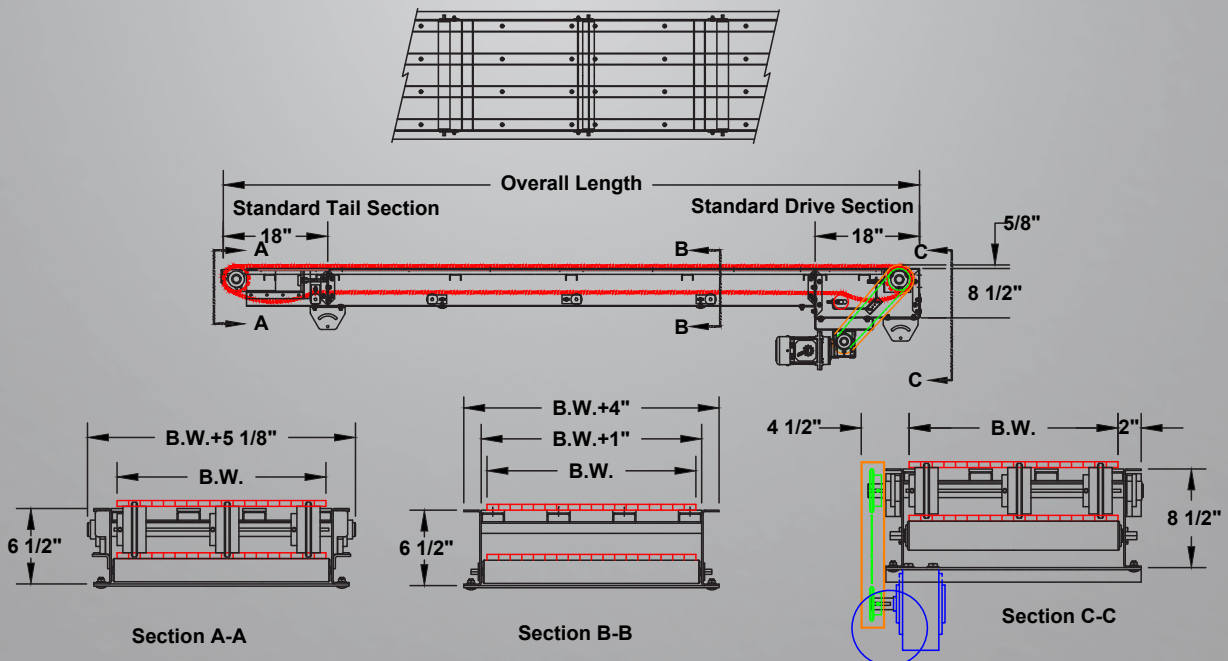

**TITAN**<sup>TM</sup>  
CONVEYORS

735 Industrial Loop Road  
New London, WI 54961

800-558-3616  
920-982-6600

sales@titanconveyors.com  
titanconveyors.com