


TITANTM **CONVEYORS**

Custom Industrial Conveyors



**Custom Conveyors
& Systems**



**Belt
Conveyors**



**Steel Belt
Conveyors**



**Roller
Conveyors**



**Specialty
Conveyors**



**Conveyor
Accessories**

www.titanconveyors.com

TITANTM **CONVEYORS**



Your conveying needs are unique and challenging. Your project time line requires a conveyor partner you can trust. At Titan our mission is to meet your needs with equipment built to last. We want the experience of working with us to be like no other in the industry.

- We work with you to carefully choose the right conveyor and accessories.
- All our conveyors and systems are drawn for your approval in AutoCADTM or Solid WorksTM, so you can be certain they are what you expect.
- Through design we have eliminated issues found in competitive products.
- Components are chosen for reliability and longevity.
- We deliver on time and we will stay with you until it's right.

www.titanconveyors.com

Product Literature • Photos • Specifications
Maintenance Manuals • Engineering Drawings
Replacement Parts • Accessories • Applications • Catalogs
Order Forms • Quick Questions • Instructional Videos



TITANTM **CONVEYORS**

735 Industrial Loop Road
New London, WI 54961
920-982-6600 800-558-3616
FAX: 920-982-7750
sales@titanconveyors.com
www.titanconveyors.com

[Go to Table of Contents](#)

Table of Contents

Custom Conveyors and Systems	2
Belt Conveyors	
Slider Bed Conveyors	4
Incline Conveyors	4
Roller Bed Conveyors	5
Slider Bed Trough Conveyors	5
Bulk Handling Conveyors	6
Sidewall Bulk Handling Conveyors	6
Cleated Belt Conveyors	7
Parts Conveyor	8
Chain Edge Belt Conveyor	8
Pallet Pro Conveyor	9
Table Top Conveyor	9
Steel Belt Conveyors	
Hinged Steel Belt Conveyors, 2-1/2" Pitch	10
Hinged Steel Belt Conveyors, 4" & 6" Pitch	11
Replacement Hinged Steel Belts	12
Quench Conveyor	13
Drag Chain Conveyor	13
"Pro-Feed" Parts Conveyor	13
Wire Mesh Belt Conveyors	14
Cooling-Drying Conveyor	15
Slat Conveyor	15
Roller Conveyors	
Chain Driven Live Roller Conveyors	16
Chain Driven Live Roller Curve Conveyor	17
Zero Pressure Accumulator	17
Motorized Driven Roller Conveyors (MDR)	18
Pop-Up Transfers & Stops	19
Pallet Destacker-Dispenser	19
Belt Driven Live Roller Conveyors	20
Belt Driven Live Roller Curve Conveyor	20
Line Shaft Conveyors	21
Gravity Conveyors	22
Ball Transfer	22
Specialty Conveyors	
Multi Strand Chain Conveyor	23
Turntables	23
Accessories	24
Warranty	Back Cover

Titan Custom Conveyors & Industrial Conveyor Systems

Since 1981 Titan Sales and Engineering have been working with industry to solve manufacturing, assembly, packaging and material handling problems. Our custom designed conveyors and conveyor systems have helped our customers get lean, cut time and get products to our customers in a more efficient manner.

We have experience and expertise in all of the most challenging applications and industries. At Titan we welcome the question "Do you think you could build a conveyor system like this?"

Titan has designed and built conveyor systems and specialty conveyors for a variety of manufacturers.

Titan conveyors are sold throughout our network of Distributors, System Integrators, and OEM 's in the United States, Canada, and Mexico. Titan also ships internationally.


Typical Applications

Over the past two decades, we've engineered and built conveyors for such applications as:

- Recycling systems and recycling conveyors
- Moving golf balls from a six-lane-wide conveyor belt to packaging machinery
- Seat, tire and wheel handling for automotive assembly lines
- Food handling of candy, mints, jelly beans, chocolate and lettuce
- Handling of 2,000 degree red-hot forgings and 600 degree parts from casting operations
- Chain roller conveyors for handling such materials as gunpowder, waste water sludge and foundry sand
- Packaging conveyors to handle totes in warehouse and distribution systems
- Appliance assembly line conveyors featuring motorized roller conveyors
- Metal recycling industry
- Glass cullet conveyors



Stern Drive Marine Engine Assembly

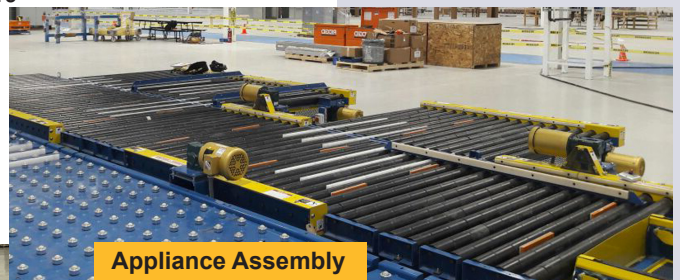

Appliance Assembly



Paper & Corrugated Baling



Custom Package Handling System



Overhead Conveyor Handling System

Titan Custom Conveyors & Industrial Conveyor Systems



Tire & Wheel System
for Auto Manufacturer



In Floor System
for
Appliance Assembly



A G C with
Companion Conveyor



Engine
Assembly System



Multi-Chain Conveyor
in Robotic Cell



Tire Shredding &
Recycling System



Metal Recycling



www.titanconveyors.com
email • sales@titanconveyors.com

TITAN
CONVEYORS

[Go to Table of Contents](#)

Belt Conveyors

Slider Bed Conveyors

Titan Slider Bed models feature rugged industrial design with grease sealed bearings and screw take-ups. Our **Model 102**, a low profile scrap and parts removal from die press, has a knurled drive for positive pull. **Titan 104 & 108** models feature square head and tail sections for system assembly that are easily integrated to other types of conveyors.

V-Guide Belts are applicable in the following conditions:

- Short, wide belts and long, narrow belts
- Where pulley flanges cannot be used or may interfere with products being conveyed
- Side loading or unloading applications
- Where the belt runs on its edge in a vertical position instead of lying flat on a conveyor surface
- When reversing applications are required



SLIDER BED CONVEYORS SPECIFICATIONS


STANDARD SPECIFICATIONS OF BELT DRIVERS			
	MODEL 102	MODEL 104	MODEL 108
Belt Widths	2" to 30"	4" to 48"	6" to 72"
Lengths	2' to 10'	5' to 40'	5' to 150'
Belt Type	PVA 60 MP NLB "Checkout"	PVC 120 Black	PVC 120 Black
Drive	1/4 HP 115/1/60 Gearmotor	1/2 HP 230/460/3/60	1/2 HP 230/460/3/60
Drive Pulley	2" dia. crowned, knurled	4" dia. crowned, rubber lagged	8" dia. crowned, rubber lagged
Frame	1-1/2" deep formed 12 ga.	4" deep formed 12 ga.	4" deep formed 12 ga.
OPTIONS			
	H.P., drive location, speed, fixed or variable speed, belt type, siderails, supports, casters, side take-up, special paint	H.P., drive location, speed; fixed or variable speed, controls, belt type, center drive & take-up, galvanized, stainless, siderails, supports, casters, V-Guide belts, other belt types, siderail skirting, special paint	
	Many other options available, consult factory representative		

Floor to Floor Slider Bed Conveyors

Models 204 and 208 Conveyors take loads between floors or to storage areas. Designed to make a smooth transition at the top with bend rollers and discharge roll over. Adjustable supports and modular design make systems assembly a breeze. Options mirror those of the 104 and 108.

FLOOR TO FLOOR SLIDER BED CONVEYORS

	MODEL 204	MODEL 208
Belt Widths	12" to 36"	12" to 48"
Other Specs	See Model 104 above	See Model 108 above
OPTIONS		
H.P., drive location, speed, fixed or variable speed, controls, power feeder, belt type, center drive & take-up, galvanized, stainless, siderails, supports, casters, other belt types, siderail skirting, special paint		
Many other options available, consult factory representative		

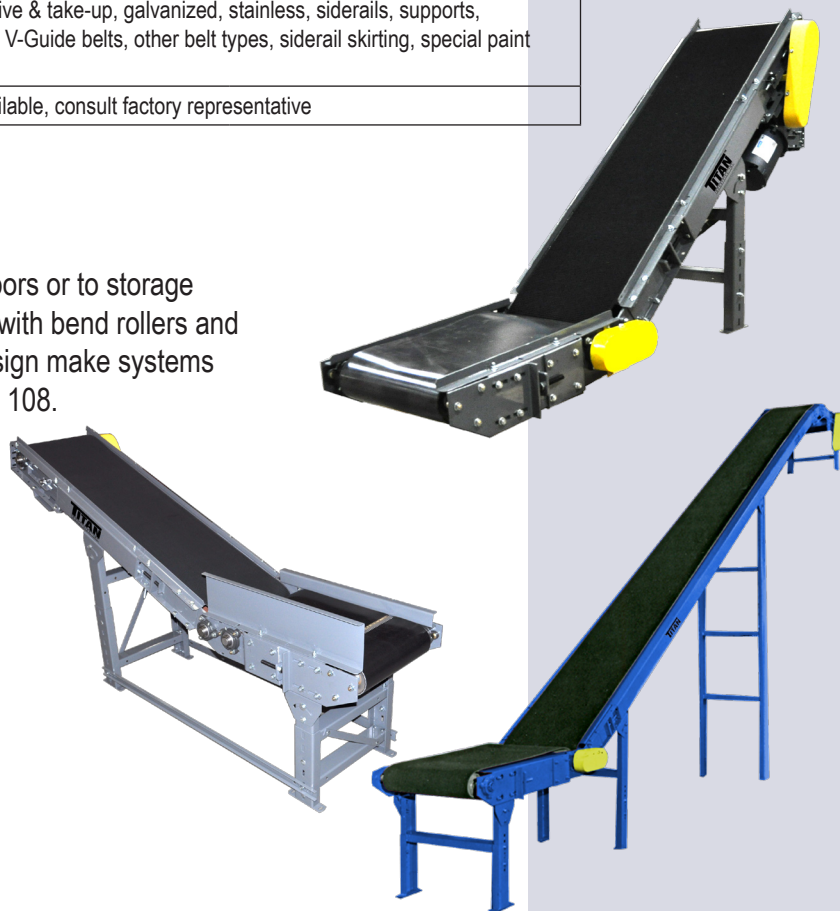

Roller Bed Belt Conveyors

Models 105 and 109 Roller Bed Belt Conveyors are designed for transporting heavy loads over long distances with less horsepower than slider bed conveyors.



ROLLER BED CONVEYOR STANDARD SPECIFICATIONS

	MODEL 105	MODEL 109
Belt Widths	8" to 42"	8" to 72"
Lengths	5' min. to 100' max.	5' min. to 100' max.
Belt Type	PVC 120 Black	PVC 120 Black
Drive	1/2 HP 230/460/3/60	1/2 HP 230/460/3/60
Drive Pulley	4" dia. crowned rubber lagged	8" dia. crowned rubber lagged
Frame	5" deep formed 12 ga.	6" deep formed 12 ga.
Roller Size	1.9 dia. x 16 ga.	2.5 dia. x 11 ga.
Rollers Center	6" centers	6" centers

OPTIONS

Belt widths from 4" to 48", lengths, roller spacing, roller size, other belt types; rough top, food grade, H.P., center drive & take-up, drive location, speeds, variable speed drives, controls, siderails, supports, casters, special paint

Many other options available, consult factory representative

Slider Bed Trough Conveyors

Model 114 & 118 Slider Bed Trough Conveyors are designed for light and medium duty bulk handling.



SLIDER BED TROUGH CONVEYORS

	MODEL 114	MODEL 118
Belt Widths	4" to 48"	6" to 72"
Lengths	5' min. to 40' max.	5' min. to 40' max.
Belt Type	PVC 120 Black	PVC 120 Black
Drive	1/2 H.P. 230/460/3/60	1/2 H.P. 230/460/3/60
Drive Pulley	4" dia. crowned rubber lagged - 4" tail pulley	8" dia. crowned rubber lagged - 4" tail pulley
Frame	4" deep formed 12 g.a.	4" deep formed 12 g.a.

OPTIONS

H.P., drive location, speed, fixed or variable speed, controls, belt widths, belt type, center drive & take-up, galvanized, stainless, siderails, supports, casters, other belt types, siderail skirting, special paint

Many other options available, consult factory representative



www.titanconveyors.com
email • sales@titanconveyors.com


TITAN
CONVEYORS

[Go to Table of Contents](#)



Belt Conveyors - Bulk Handling

Sidewall Conveyor

Model 340 Sidewall Conveyors are designed to move bulk product up inclines with full containment.

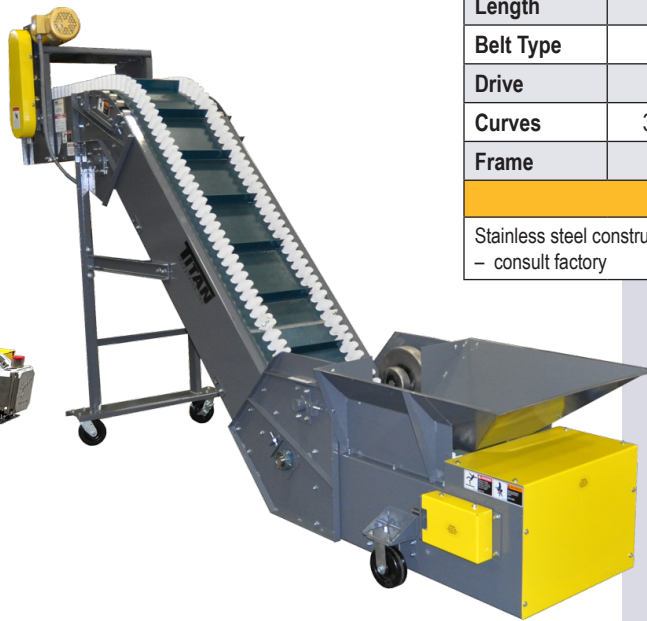

SIDEWALL CONVEYORS SPECIFICATIONS	
Belt Width	Selected to suit application
Length	Determined by application
Belt Type	Selected to suit application
Drive	Sized to suit application
Curves	30°, 45°, 60° curves available
Frame	Formed 12 gauge
OPTIONS	
Stainless steel construction, Food grade belting, Curves – consult factory	

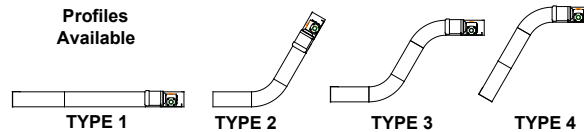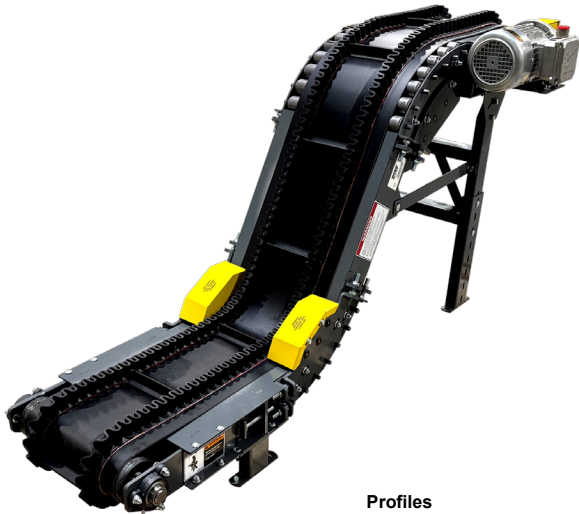

Roll Trough Bulk Handling Conveyors

Model 460 Bulk Handling is specifically designed to handle large volumes of heavy, abrasive and granular products at a very reasonable cost. Rugged construction and certified components provide for long runs and outdoor applications.



MODEL 460 - 3 ROLL TROUGH BULK HANDLING	
Belt Widths	Sized by application
Lengths	Per application
Belt	Per application
Drive	1 H.P. 230/460
Drive Pulley	14" dia. crown face rubber lagged drive
Frame	6" structural channel
Pulleys	14" tail pulley
Idler Rollers	2 or 3 roll CEMA
OPTIONS	
2-roll available, Drive as needed, Belt Width - consult factory, Idlers 35 & 45 degree available, consult factory on take-ups and maximum lengths, Speed, Variable speed available, H.P., Controls, Paint, Supports, Drive location	

Cleated Belt Conveyor

Model 304 & 308 Cleated Belt Conveyors are ideal for moving small parts from one location to another or custom designed for large bulk handling in recycling facilities. Available with adjustable undercarriage.



Cleated Belt Conveyor Specifications

	Model 304	Model 308
Belt Widths	4", 6", 8", 12", 18", 24", 36"	12", 18", 24", 30", 36", 48", 60", 72"
Lengths	5' to 12'	Specify
Drive	1/2 HP 230/460/3/60	1/2 HP 230/460/3/60
Drive Pulley	4" dia. crowned rubber lagged	8" dia. crowned rubber lagged
Frame	6-1/2" deep, formed 12 ga.	11-1/2" deep, formed 12 ga.
Siderails	3-1/2" high, fixed	3-1/2" high, fixed
OPTIONAL		
Speed, variable speed, belt widths, belt type, side mount/bottom mount drive, controls, hopper, discharge chute, siderails, galvanized, stainless, supports, adjustable undercarriage, casters, special paint		



Belt Conveyors

Parts Conveyor

Model 310 Parts Conveyor is designed for lightweight parts. It goes from horizontal to incline with no transfer.

MODEL 310 STANDARD SPECIFICATIONS

Belt Widths	4", 6", 8", 12", 18", 24"
Lengths	24" infeed, 36" incline (others available)
Curves	30°, 45°
Belt Type	Black PVC 120 with 1 1/2" high cleat on 12" centers
Drive	1/2 H.P. 230/460/3/60
Drive Pulley	4" diameter crown faced rubber lagged
Frame	6 1/2" deep formed 12 ga.

OPTIONS

Drive location, speed, variable speed, controls, lengths, belt type, hopper, discharge chute, siderails, supports, casters, special paint, cleats - Consult Factory



Chain Edge Belt Conveyor

Model 661 is ideally suited for corrugated, paper handling, solid waste and feeding pulpers.

MODEL 661 SPECIFICATIONS

Belt Widths	12", 18", 24", 30", 36", 48", 60", 72"
Belt Type	6" Pitch Chain Edge PVC
Curves	30°, 45°, 60°
Frame	Formed or Open style with access panels
Drive	H.P. Size per application
Drive Sprocket	8 Tooth 12" P.D.


OPTIONS

Belt width, drive, drive location, fixed or variable speed, controls, paint, hopper, supports: Belting - Consult factory



Pallet Pro Conveyor

Titan's Pallet Pro Heavy Duty Plastic Belt Conveyor solves the problem of conveying and transferring pallets that are irregular, imperfect or peg type pallets better than standard roller type conveyors. The heavy duty plastic belt enables end or side loading, allows for minimum transfer gaps and is bi-directional.

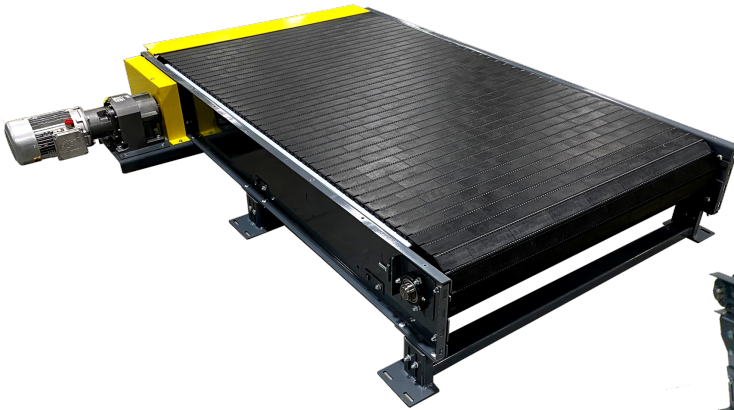

MODEL PALLET PRO

Belt Widths	12" to 62 3/4"
Lengths	Per application
Belt Type	Plastic, Uni-Belt
Drive	1 H.P. 230/460/3/60
Frame	4 3/4" deep 7 gauge
Deck	7 ga., U.H.M.W. top

OPTIONS

Drive location, drive sprockets, speeds, controls, galvanized or stainless construction, supports, belt type, paint

Table Top Conveyor


Titan Table Top Conveyors can serve your transporting, merging, diverting or accumulation problems. Table Top Conveyors can solve a wide range of processing requirements including labeling, production inspection, product filling and weighing. Stainless Steel options are available for food and clean room handling.

MODEL TABLE TOP

Belt Widths	3 1/4", 4", 4 1/2", 6", 7-1/2"
Belt Type	Plastic, carbon steel or stainless
Lengths	Per application
Curves	Per application
Drive	1/2 H.P. 230/460/3/60
Frame	7" deep formed 12 ga.

OPTIONS

Stainless construction, Interlox belt, customized siderails, Bottom or side mount drive, Fixed speeds - specify speed required, variable speed with DC motor and SCR controller or AC inverter, Paint choice

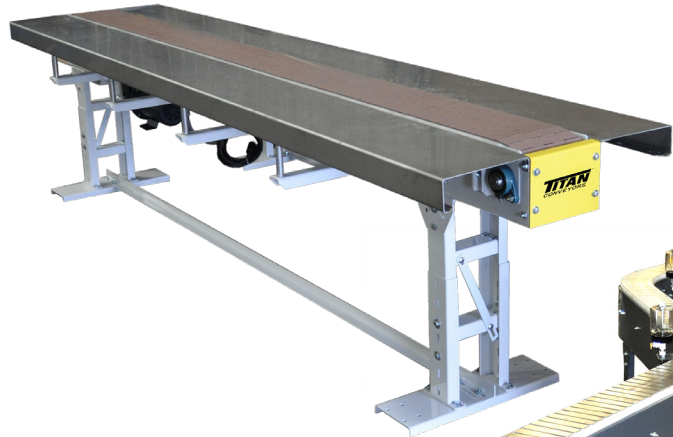

www.titanconveyors.com
email • sales@titanconveyors.com


TITAN
CONVEYORS

[Go to Table of Contents](#)

Steel Belt Conveyors

Model 610 Hinged Steel Belt Conveyor

Model 610 - 2 1/2" hinged steel belt conveyor is ideal for chip removal from machining operations. It's low profile, flared infeed siderails and liquid tight bottom pan make it the ideal scrap removal conveyor.

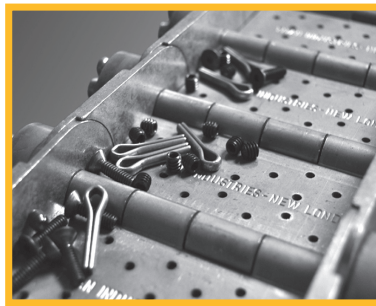


**Titan Exclusive Radial Siding
Eliminates Gaps**

Model 620 Hinged Steel Belt Conveyor

Model 620 - When an application requires a low profile frame. The Model 620 can be furnished with either stamped low profile siderails or the exclusive Titan powdered metal siding which virtually eliminates any gap between the siding and apron, thus reducing jamming problems.

Model 630 Hinged Steel Belt Conveyor

Model 630 - The Model 630 Titan Hinged Steel Belt Conveyor is the full profile unit in our complete line of hinged steel belt conveyors. The Model 630 is constructed of 10 gauge frame and 3/16" thick track. Four different configurations are available to provide complete flexibility to fit your requirements. A 2-1/2" pitch belt with 1-1/2" high stamped siderails and 12 gauge apron is furnished as standard.

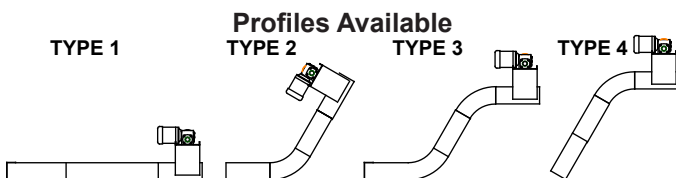

2-1/2" PITCH HINGED STEEL BELT MODELS STANDARD SPECIFICATIONS

	MODEL 610	MODEL 620	MODEL 630
Belt Width	6" to 24"	6" to 36"	6" to 36"
Belt Type	2-1/2" pitch radial siding	2-1/2 pitch low profile or radial siding	2 1/2" pitch 1-1/2" standard stamped siding
Curves	30°, 45°, 60°	30°, 45°, 60°	30°, 45°, 60°
Frame	6-11/16" deep formed 12 ga.	7" deep formed 10 ga.	8-5/8" deep formed 10 ga.
Drive	1/2 H.P. 230/460/3/60	1/2 H.P. 230/460/3/60	1/2 H.P. 230/460/3/60
Drive Sprocket	5 Tooth, 4.25" P.D.	5 Tooth, 4.25" P.D.	6 Tooth, 5" P.D.
Chain Pull	1,200 lbs.	2,500 lbs.	2,500lbs.

OPTIONS

Drive location, H.P., fixed and variable speed, controls, tanks, chutes, plumbing, top covers, chip suppressors, casters, liquid tight bottom pans, paint, supports,
Belt: pimpled, perforated, welded barrels, impact plates, wiper cleats, cleat heights, sidebars on narrower belts

Many other options available, consult factory representative

Steel Belt Conveyors

Model 640 4" Hinged Steel Belt

Model 640 - 4" pitch hinged steel belt conveyor offers heavy duty suitable for automotive and foundry applications.

STANDARD SPECIFICATIONS

	MODEL 640 - 4" PITCH	MODEL 660 - 6" PITCH
Belt Width	6" to 72"	12" to 96"
Belt Type	4" pitch, 10 ga. apron	6" pitch x 1/4" apron
Curves	30°, 45°, 60°	30°, 45°, 60°
Frame	15" deep formed 10 ga.	21" deep formed 7 ga.
Drive	1/2 H.P. 230/460/3/60	3/4 H.P. 230/460/3/60
Drive Sprocket	6 Tooth, 8" P.D.	6 Tooth, 12" P.D.
Chain Pull	4,000#	8,900#


OPTIONS

Drive location, H.P., Fixed and variable speed, Impact rails on infeed frame, T-slot bearings, customized siderails, infeed hoppers, casters, Liquid tight bottom pans, coolant tanks, plumbing, top covers, paint, supports,
Consult factory for special applications and construction of belt.



Model 660 6" Hinged Steel Belt

Large scrap handling systems dictate using a rugged steel belt. By using the unique Titan 6" pitch belting, the **Model 660** will satisfy most heavy-duty scrap handling requirements. Our uniquely designed sidewing reduces the gap between sidewing and apron (eliminating carryover) and yet the rugged (1/4" thick) design compensates for most severe applications.

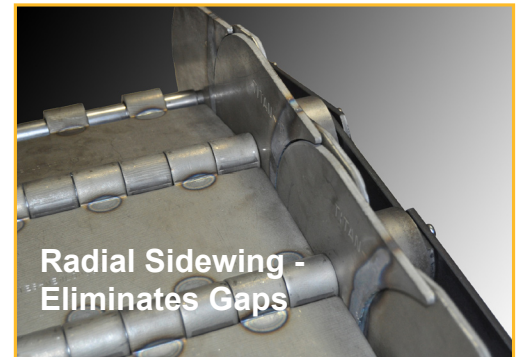

www.titanconveyors.com
email • sales@titanconveyors.com

TITAN
CONVEYORS

[Go to Table of Contents](#)

Hinged Steel Belts



Titan makes replacement Hinged Steel Belt replacements for any manufacturer. Call factory for details, save money and time.

2 1/2" pitch Exclusive Titan Radial Sidewings

Close the Gap

With exclusive Titan Powdered metal sidewings, the opening between sidewings and apron is reduced to a maximum of .010". Tight tolerance is maintained regardless of direction or belt flex.


2 1/2" PITCH RADIAL SIDEWING

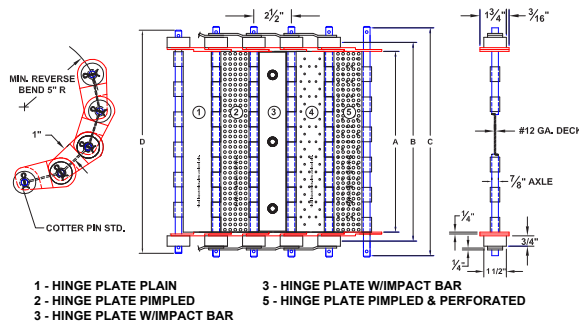


Perforated belt shown

Titan hinged steel belt was developed to handle stamping, metal scrap, paper scrap, chips, turnings, castings and parts, plus numerous other materials. The standard 2 1/2" pitch belt is interchangeable with other conveyor or belt manufacturers. All parts on standard belts are available from stock. Standard profile and low profile sidewings are available. Belt widths from 4" to 48" in increments of 2"

2 1/2" Pitch Belts

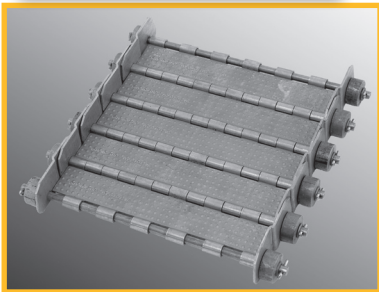

2 1/2" Pitch Stamped Sidewing Hinged Steel Belt

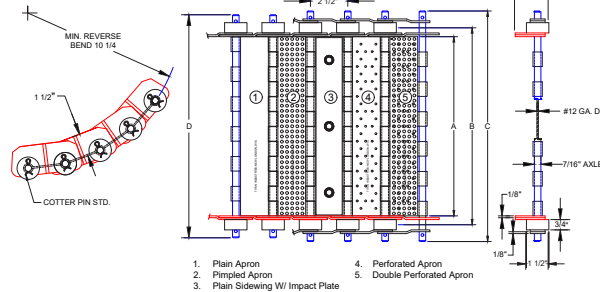


**Chain Pull: 1200#
2500# (with side bar)**


4" Pitch Belts

The Titan 4" pitch hinged steel belt features the 2" diameter flanged rollers as standard. The flanged rollers aid belt tracking. When Titan belts are used to replace those of other manufactures, Titan can supply those belts with regular flat face rollers if needed for rough loading conditions, Titan will add reinforcement bars to the 10 ga. apron.

4" Pitch Hinged Steel Belt w/Radial Sidewings

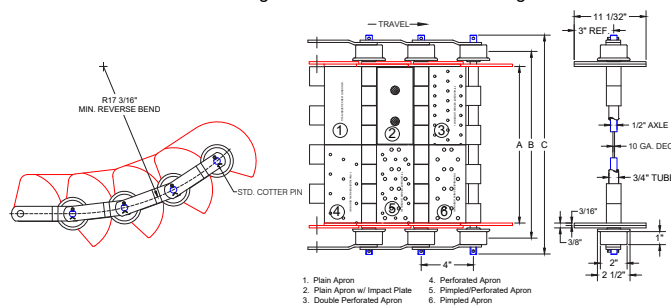


Chain Pull: 4000#




6" Pitch Belts

6" Pitch Hinged Steel Belt w/Stamped Sidewings

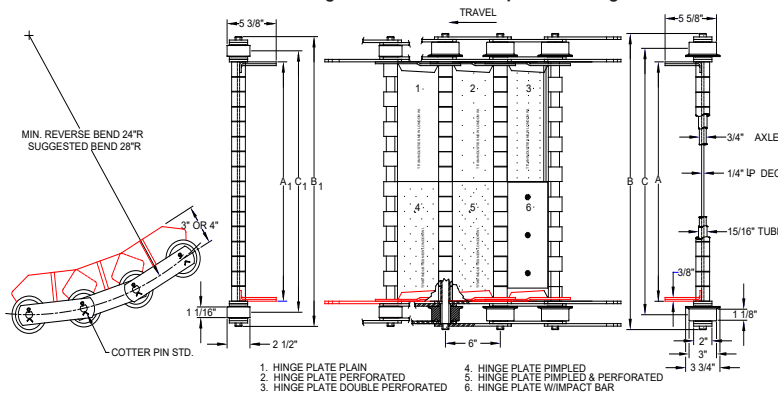

Chain Pull: 8900#

A genuine heavy-duty belt equal to the demands of sophisticated, automatic scrap handling systems. Belts feature full 1/4" thick apron and sidewings, a 15/16" tube with a 3/4" trough pin, and die formed hinges which eliminate the usual weld bead. Belts also have a 3" diameter single flange cast iron rollers with hardened bushings. Titan can also supply them with flat face rollers if desired.

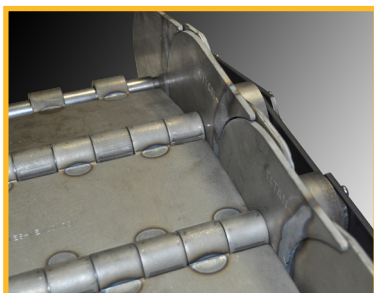

Welded Barrels shown

Steel Belt Conveyors


Quench Conveyor

Titan's Quench Conveyor is designed to quench or cool heavy-duty parts. It's built with a liquid tight horizontal tank. It can be supplied with wire mesh belt, plastic or steel belt.



Drag Chain Conveyor Model 670

The **Model 670 Drag Flight Chain Conveyor** is ideal for handling cast iron, fine chips, scrap or sludge that would jam a Hinged Steel Belt unit. The 2-1/2" pitch chain has drag flights welded on 12-1/2" centers. Various configurations, lengths and belt widths from 6" to 36" are available. Frame 7 ga. x 8 5/8" deep.

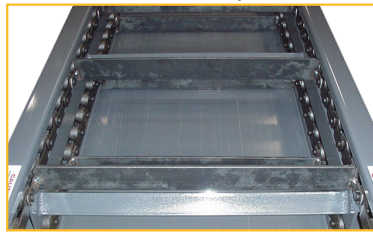

"Pro Feed" Model 350


Titan Model 350 "Pro Feed" conveyor can handle a wide variety of parts from very small to odd shapes. Our exclusive Radial sidewing design eliminates trapping of parts.



Special discharge chute



Custom hopper for delicate parts

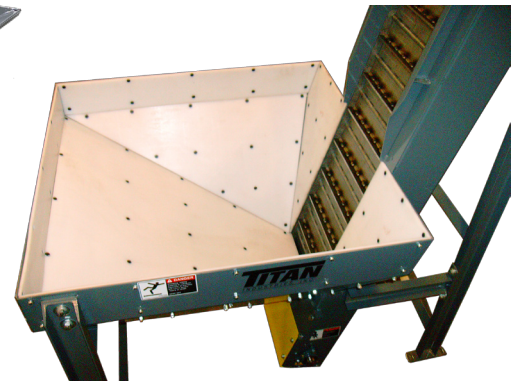

MODEL 350 "PRO FEED" SPECIFICATIONS

Belt Width	6", 8", 12", 18"
Discharge Ht.	6' 0"
Belt Type	2-1/2" pitch hinged steel
Drive	1/2 H.P. 230/460/3/60
Hopper	7 cu. ft.
Frame	Formed 10 ga. - 6 15/16" Dp.

OPTIONS

Custom Hopper, Discharge heights, Discharge chute, Belt widths, Belt type, Speed, Variable speed, Controls, Drive, Galvanized, Stainless, Casters, Paint, Hopper size - Consult factory

www.titanconveyors.com
email • sales@titanconveyors.com

TITAN
CONVEYORS

[Go to Table of Contents](#)

Steel Belt Conveyors

Model 124 Wire Mesh Belt Conveyor



Titan **Model 124 Wire Mesh Belt Conveyor** can be used to convey hot, oily, or cold products in cooling, oven or other special spraying and drying conditions. Titan offers either a Roller Bed Deck or Wear Strip Deck to meet your material handling needs.


MODEL 124 SPECIFICATIONS

Belt Widths	8", 12", 18", 24", 30", 36", 42", 48"
Lengths	5' min. based on application
Belt Type	1/2" x 1" galvanized flat wire mesh
Drive	1/2 H.P. 230/460/3/60
Speed	60 f.p.m.
Drive Sprocket	13 tooth, 4.4" P.D., H.D., Keyed
Frame	Formed 10 ga. - 6 1/2" Deep
Deck-Wear Strip	Longitudinal steel wear strips
Deck-Roller Bed	1.9 Dia. x 16 ga.


OPTIONS

H.P., drive location, speed, fixed or variable speed, controls, other belt types, belt widths, deck wear strip options, center drive & take-up, galvanized, stainless, siderails, supports, casters, special paint


Belt Options- Consult Factory




Flat Wire



Plastic



Balance Weave

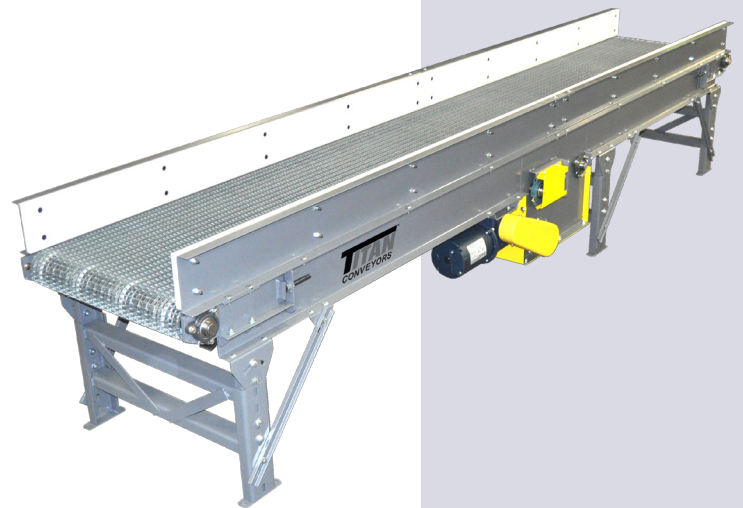

Model 305 Wire Mesh Belt Conveyor

Titan **Model 305 Wire Mesh Belt Conveyors** are ideal for heat treated, washed, dried or quenched parts.

MODEL 305 SPECIFICATIONS

Belt Widths	4", 6", 8", 12", 18", 24", 36"
Lengths	5' min. to 20' max.
Belt Type	1/2" x 1" gal. flat wire mesh w/ 1-1/2" high cleats on 12" centers
Drive	1/2 H.P. 230/460/3/60
Drive Sprocket	13 tooth, 4.4" P.D., H.D., Keyed
Frame	6-1/2" deep formed 12 g.a.

OPTIONS


Fixed speed, variable drives, controls, side mount/bottom mount drive, belt widths, belt type, siderails, hopper, discharge chute, galvanized, stainless, knee braces, ceiling brackets, supports, casters, special paint, cleat height - consult factory



Steel Belt Conveyors

Cooling/Drying Conveyor

Titan's Cooling/Drying Conveyor replaces water quench and reduces cool down time. Custom designed from standard components. Consult factory.

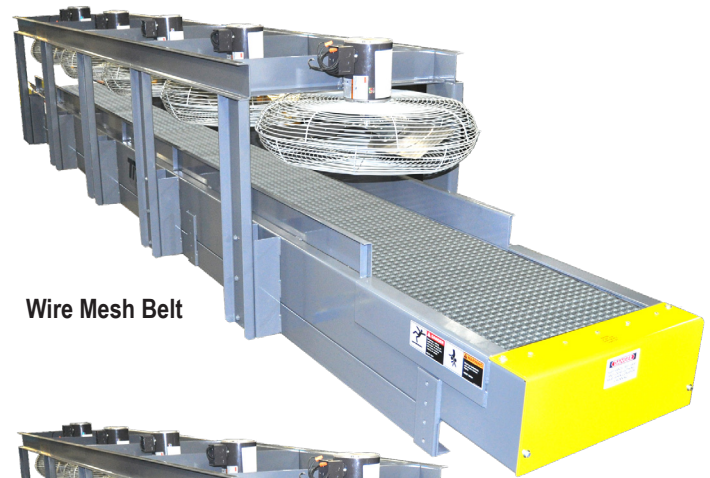

Wire Mesh Belt



Steel Slat Belt



Hinged Steel Belt

Slat Conveyor

Titan Slat Conveyors are ideal for assembly line, appliance and furniture production applications where a flat carrying surface is needed and where product movement is slow through work stations. Slat conveyors are also used for transportation, accumulation, side loading and unloading and frequent stop/start applications.



SLAT CONVEYOR STANDARD SPECIFICATIONS

Slat Widths	12" to 24" (to 72" available)
Drive	H.P. to suit application
Speed	30 f.p.m.
Slats	Formed 7 ga.
Frame	Formed 7 ga.
Belt	6" pitch (SR196)

OPTIONS

Drive location, speed, Slat widths to 72", Slats - Wood or UHMW covered, Belt - 4" pitch (SR194), H.P., work leaves, push offs, fixtures mounted on slats, special paint



Roller Conveyors

Chain Driven Live Roller Conveyor



Chain Driven Live Roller (CDLR) conveyors feature sprocketed rollers and roll to roll chain system that provide positive driving power to the product. Pop-up chain transfers, stops, pin stops and other options are available on all models.

Titan Model 519 light duty chain driven live roller conveyor is ideal for tote pans, castings, drums or light pallet loads.

Titan Model 525 medium duty chain driven live roller conveyor is ideal for pallets, skids and drums.

Titan Model 526 medium-heavy duty chain driven live roller conveyor is ideal for pallets, skids and drums. With a thicker walled roller than the Model 525, the Model 526 will handle loads 2 times heavier than the Model 525.

Titan Model 535 heavy duty chain driven live roller conveyor is ideal for pallets, skids and drums.

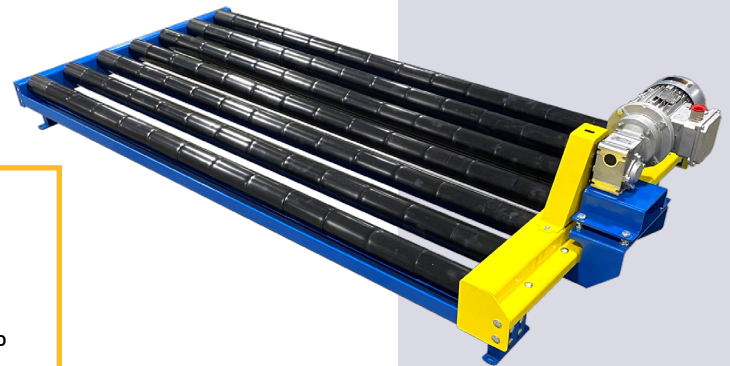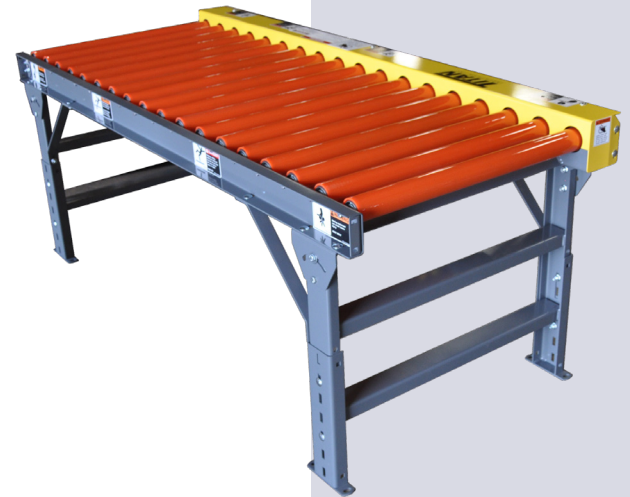


OPTIONAL ROLLER RETENTION

STYLE #1

STYLE #2

STYLE #3



COTTER PIN

RETAINING STRIP

SPRING LOADED

NOTE: NOT AVAILABLE
ON MODEL #435

CHAIN DRIVEN LIVE ROLLER CONVEYOR STANDARD SPECIFICATIONS

	MODEL 519	MODEL 525	MODEL 526	MODEL 535
Effective Widths	12" to 50"	15" to 72"	15" to 80"	15" to 114"
Lengths	Per application	Per application	Per application	Per application
Roller Size	1.9" Dia. x 16 ga. with 7/16" hex shaft	2 1/2" dia. x 11 ga. with 11/16" hex shaft	2 5/8" dia. x 7 ga. with 11/16" hex shaft	3 1/2" dia. x .300 wall on 6" centers (#2500 roll rating)
Roller Center	Various	Various	Various	Various
Frame	Formed 10 ga.	Formed 7 ga.	Formed 7 ga.	Structural channel
Drive	1/2 H.P. 230/460/3/60	3/4 H.P. 230/460/3/60	3/4 H.P. 230/460/3/60	3/4 H.P. 230/460/3/60
Chain Drive	#40	#50	#50	#60

OPTIONS


Roller Space - Consult factory, Roller Center - Consult Factory, Drive locations: as needed, Galvanized or stainless construction, H. P. , Speeds, Variable speed, Controls, Paint, 2 or 3 strand chain transfers, Pallet lifts, "C" Face brake and Fixed end stop, Rollers set low, UHMW sleeves and Knee braces, Air operated blade stop, Supports - 6" @ #8.2 structural channel, Chain - #80 with roller on 6 7/16" centers (Model 535),



Roller Conveyors

Chain Driven Live Roller Curve Conveyor

Titan Model 595 heavy duty chain driven live roller curve conveyor is ideal for pallets, skids and drums. Modular design fit system applications

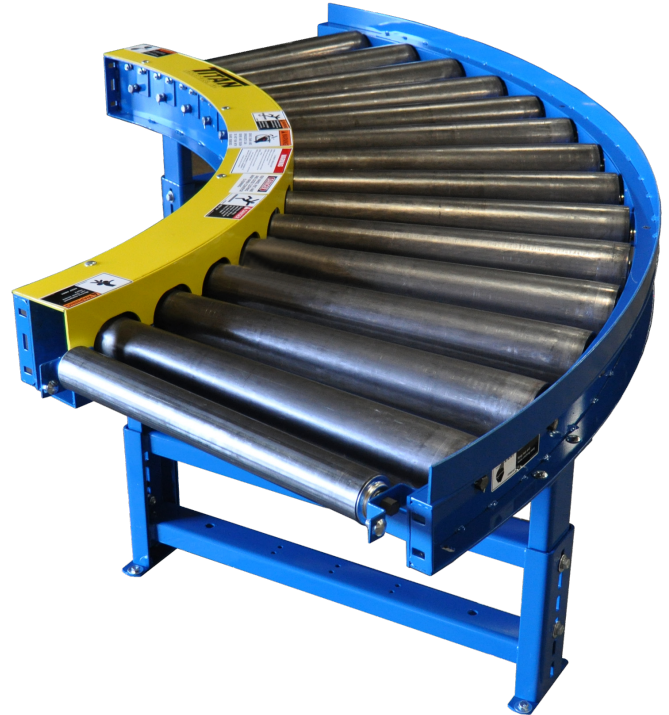

MODEL 595 SPECIFICATIONS

Effective Widths	15" to 72"
Curves	90°
Rollers Size	2 1/2" dia. small end tapered x 11 ga. and #50 chain
Chain Drive	#50 roller to roller
Drive	3/4 H.P. 230/460/3/60
Frame	6" @ #8.2 structural channel

OPTIONS

Curves - 30°, 45°, 60° available, Drive - as needed, Chain - #60, Rollers - 2 1/2" dia. x 11 ga. (straight), Speeds, Variable speed, Controls, Supports, Paint, Stainless or Galvanized construction, Casters

Zone Accumulation

Titan Zone Accumulation Conveyors are designed to accumulate products and containers into zones without contact, commonly termed "Zero Pressure Accumulation" or "ZPA". Available "Plug & Go" logic makes control easy and reduces cost.

Styles:

1. Zones have individual conventional drives.
2. Zones are engaged by air clutch from a single drive.
3. Zones have individual motorized roller drives.

Titan offers designs compatible with all models and types of roller conveyors.



www.titanconveyors.com
email • sales@titanconveyors.com

TITAN
CONVEYORS

[Go to Table of Contents](#)


Motorized Driven Roller Conveyor

Titan Conveyors™ introduces the **Motorized Driven Roller Conveyor**, a modular conveyor system utilizing a 24 volt DC motorized drive within a roller. Adjacent rollers are slave-driven from it using chains, Poly V-Belts, or Urethane O-belts. Loads up to 3900# can be moved with these clean and efficient motorized roller systems.


Among many advantages of the **Motorized Roller Conveyor** are:

- Maintenance free
- Lower operating cost
- Plug & play controls
- Lower power consumption
- Reversible
- No awkward motor & gearbox
- Quieter
- Dynamic braking
- Low profile pop-up transfer
- 24v Safety
- Variable speed


Motorized roller conveyors are perfect for large zone controlled systems in assembly lines or unit handling of pallets and cases.

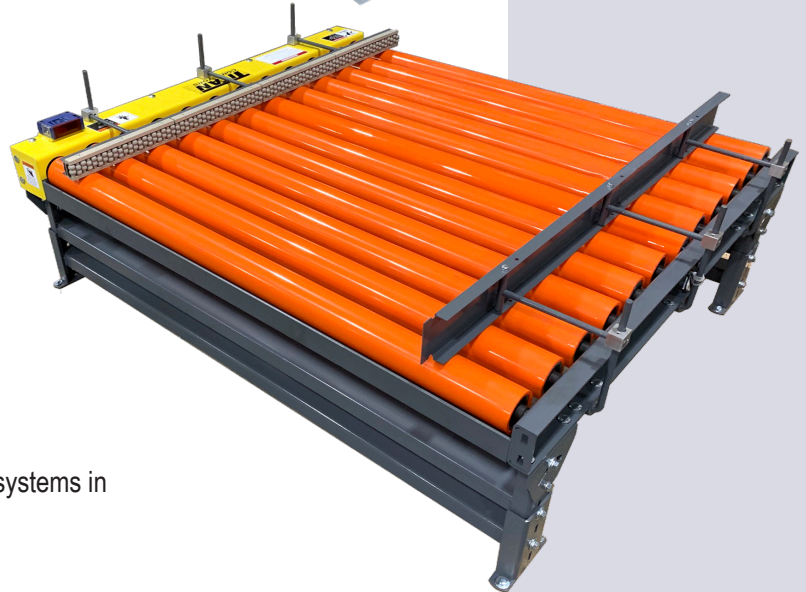

Chain & Belt Drive Options



Chain Driven Roller



Poly Flat Belt Driven Roller



Urethane O-Belt Driven Roller




Belt or Chain Driven Motorized Roller Conveyor Specifications			
	Model MDR (Urethane O-Belt)	Model MDR (Chain to Chain & Poly V-Belt) 1.9" dia. roller	Model MDR (Chain to Chain & Poly V-Belt) 2-1/2" dia. roller
Effective Widths	13" to 42"	13" to 42"	13" to 72"
Lengths	3' Min.	3' min.	3' min.
Roller Size	1.9" Dia. x 16 ga. with 7/16" hex shaft	1.9" Dia. x 16 ga. with 7/16" hex shaft	2.5" Dia. x 11 ga. with 11/16" hex shaft
Roller Center	2-1/4", 3", 4", or 6"	4", 6", 12"	2-13/16", 3-7/16", 4-3/8", 5", 6", 10"
Frame	Formed 10 ga.	Formed 10 ga.	Formed 7 ga.
Drive	Itoh Denki 24 Volt DC Motor Driven Roller	Itoh Denki 24 Volt DC Motor Driven Roller	Itoh Denki 24 Volt DC Motor Driven Roller
Roll to Roll Drive	Poly O-Belt	Poly V Belt or #40 Chain	Poly V-Belt or #40 or #50 Chain
OPTIONAL			
Roller Centers - Consult Factory, Galvanized or stainless construction, Controls, Coated rollers, Paint, 2 or 3 strand chain transfers, Pallet lifts, End stops, UHMW sleeves, Air operated blade stop, Supports			

Roller Conveyors

Pop-Up Transfers and Stops

Titan Pop-Up transfers & stops are designed for integration into Titan roller conveyor systems.

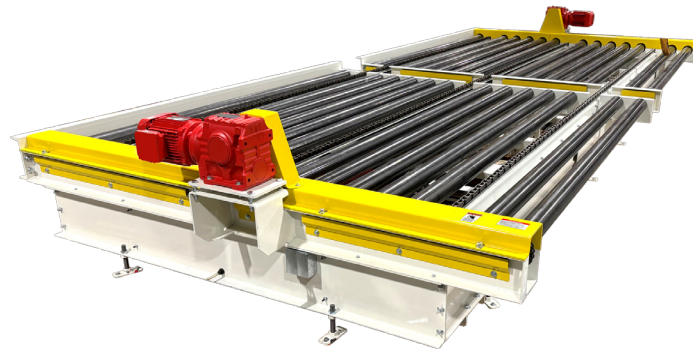

Pallet Destacker-Dispenser



Titan Destacker Pallet Dispenser is designed to stack or destack pallets in automated pallet handling systems. No more stacking or destacking products by hand as operation is smooth and delivers the pallets exactly as you need them. Stackers & destackers will increase production and efficiently improve ergonomics in your operation. All of our destackers are custom built to meet your needs.


Titan Destacker Pallet Dispenser can be designed and built specifically to handle a variety of products such as:

- Wood Pallets
- Plastic Pallets
- Totes
- Trays
- Racks
- Full Pallet Loads

Consult your Titan Representative for further details.

Engineered to fit any application

- Your choice of hydraulic, pneumatic or electro-mechanical power
- Heavy duty construction
- Dispense wood, plastic, metal pallets
- Interface with existing systems
- Control packages available
- Forklift and automatic load models

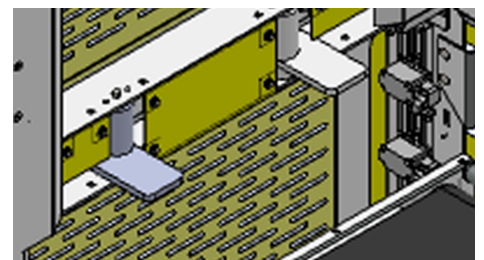

www.titanconveyors.com
email • sales@titanconveyors.com

TITAN
CONVEYORS

[Go to Table of Contents](#)

Roller Conveyors

Belt Driven Live Roller Conveyors

Titan Model 402 is ideally suited for horizontal conveying items where transfer, unloading, sideloading or accumulation is required in light duty applications. Ideal for small items where close standard roller spacing is required.

Titan Model 404 is ideally suited for medium duty horizontal conveying items where transfer, unloading, sideloading or accumulation is required in light duty applications.

Titan Model 408 for applications demanding heavy duty belt driven live roller.



BELT DRIVEN LIVE ROLLER CONVEYOR STANDARD SPECIFICATIONS

	MODEL 402	MODEL 404	MODEL 408
BF Dimensions	10", 13", 16", 19", 22"	13", 16", 19", 22", 25", 28", 31", 34", 37", 40"	13", 16", 19", 22", 25", 28", 31", 34", 37", 40", 42", 48", 54", 60"
Lengths	3' Min. to 50' Max.	3' Min. to 100' Max.	3' Min. to 100' Max.
Roller Size	1 3/8" dia. x 18 ga. with 5/16" hex axle	1.9" x 16 ga. with 7/16" hex axle	1.9" x 16 ga. with 7/16" hex axle, 42"+ 2.5" x 11 ga.
Roller Centers	6", (3", 4-1/2" Options)	6", (3", 4-1/2" Options)	6", (3", 4-1/2" Options)
Belt Type	PVC 120	PVC 120	PVC 120
Frame	6 1/2" deep formed 12 ga.	6 1/2" deep formed 12 ga.	11" deep formed 12 ga.
Drive	1/2 H.P. 230/460/3/60	1/2 H.P. 230/460/3/60	1/2 H.P. 230/460/3/60
Drive Pulley	4" dia. crown faced rubber lagged	4" dia. crown faced rubber lagged	8" dia. crown faced rubber lagged

OPTIONS

Belt Type, Drives - Fixed speeds-specify speed req., variable speed with DC motor and SCR controller or AC inverter, Motor - 3/4, 1, 1-1/2, 2 HP, TEFC, severe duty, inverter duty, brake motor, Controls, Internal take-up, Center drive, 1", 3 1/2", & 6" side rails available, Casters - 4" or 6" rigid, Side mount drive, Knee braces/ceiling hangers, Bolt on bottom pans, Rollers on 1 1/2" centers, Galvanized or Stainless steel construction

Belt Driven Roller Curve

Titan Model 490 belt driven roller curve features tapered rollers to maintain product orientation. The Model 490 is compatible with many other Titan models.



MODEL 490 SPECIFICATIONS

STANDARD

Between Frame-Straight Rollers	13", 16", 19", 22", 25", 28", 31", 34", 37", 40"
Between Frame-Tapered Rollers	13", 16", 22", 28", 34", 40"
Curves	90° standard, (30°, 45° Opt.)
Rollers	1.9 dia. x 16 ga.
Drive	1/2 H.P. 230/460/3/60
Frame	Formed 12 ga.

OPTIONS

Roller sizes, siderails, caster, transfer rollers, galvanized, coated, tapered rollers, stainless or galvanized construction, motors, speeds, variable speed, drive location, casters, controls, paint, supports

Roller Conveyors

Line Shaft Conveyor

Titan PATHWAY™ Line Shaft conveyors are the most economical way to transport, manage and manipulate boxes and totes.

STANDARD COMPONENTS

Width BF - 13", 16", 22", 28", 34", 40"

Roller Centers - 2 1/4", 3", 4", 6"

Rollers 1.9 dia. x 16 ga. Drive Section

Drive - As selected from factory

230/460

2'0" in length includes bed, motor base, drive guard and assembly of drive package

Paint - 1 coat gray

Speed - As selected through factory counsel

Curve Section

Width BF - 13", 16", 22", 28", 43", 40"

Fully Assembled

20 true taper rollers in 90° curve

90° Urethane Belt Transfer Section

Air Actuated (4) 3/8" dia. urethane transfer belts

Power Cross Over Section

Standard system compatibility

Wheel Divert Section

Standard system compatible

High speed urethane divert wheels

Gate Section

3'0" or 4'0" length

Supports

Standard "H" type

OPTIONS

Controls

Plastic coated rollers

1" - 3 1/2" side rail

1 3/8" dia. x 18 ga. rollers

Hand operated stop

Air operated stop

Knee braces

Ceiling hanger brackets

Turning Wheel




Traffic cop

Accumulation zone - 18", 24", 30", 36"


Sensor rollers

Special paint

Consult factory for special operating conditions

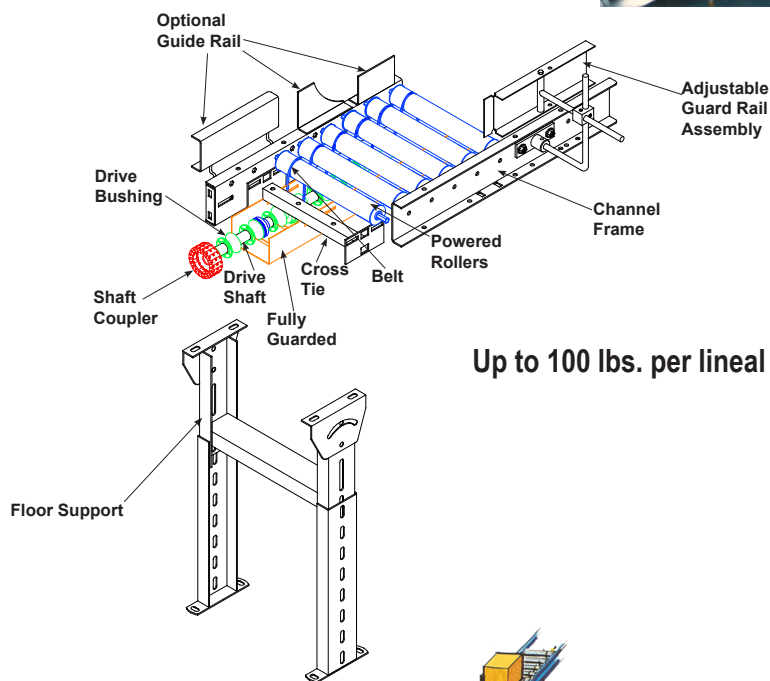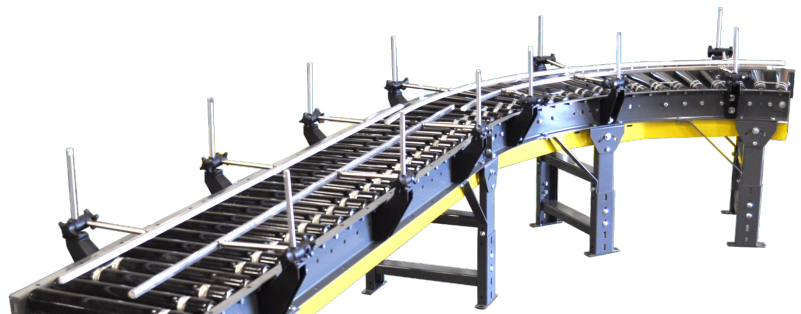

Up to 100 lbs. per lineal foot capacity

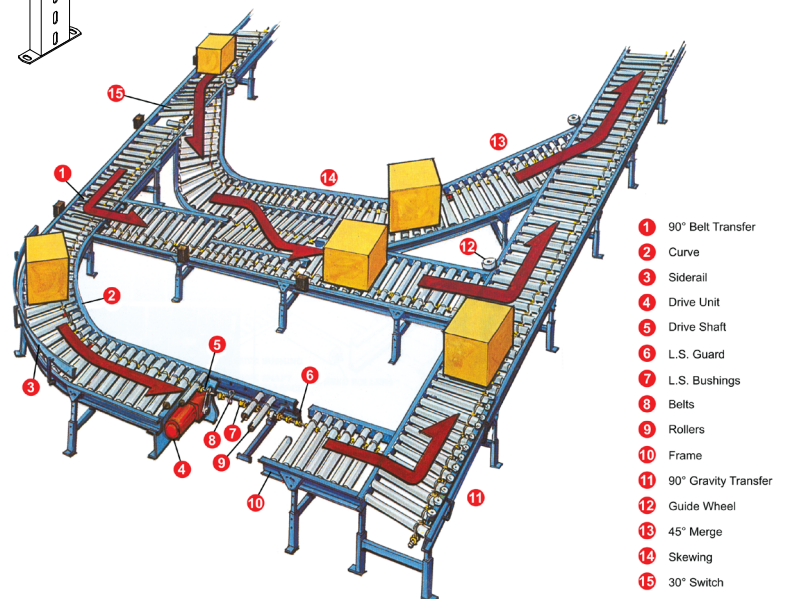

www.titanconveyors.com
email • sales@titanconveyors.com



TITAN
CONVEYORS

Go to Table of Contents



Gravity Conveyor

Titan Models 413, 419, 425, 426 and 435 gravity roller conveyors provide an economical means of carrying light to heavy weight packages and products.



MODEL 413





MODEL 419






MODEL 425



MODEL 426



MODEL 435

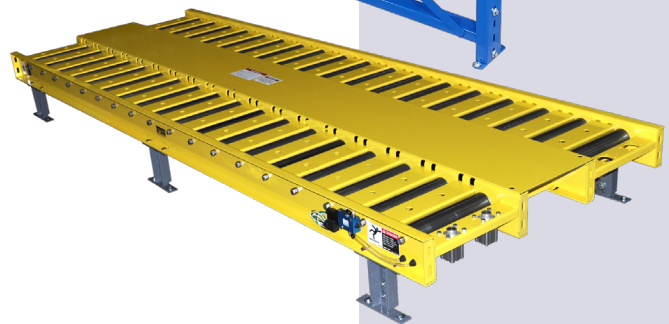

GRAVITY CONVEYOR OPTIONS

Supports, siderails, casters, pop-up stops, fixed end stops, manual gates, galvanized, coated, plastic or stainless steel rollers

Gravity Conveyors - CAPACITY PER ROLLER

MODEL 413	12 ga.	95 lbs.
MODEL 419	10 ga.	250 lbs.
MODEL 425	7 ga.	625 lbs.
MODEL 426	7 ga.	650 lbs.
MODEL 435	Structural	2,500 lbs.

Ball Transfer Table

The Titan Ball Transfer Table is used for manually rotating, shifting, turning, positioning at work stations a wide variety of products.



Specialty Conveyors

Multi-Strand Chain Conveyor

Titan Multi-Strand chain conveyor is ideal for heavy duty unit loads. Best suited for products with unusual characteristics such as pallets or heavy tote pans. Chains can be customized with fixtures. Many options are available.



Turntables/Rotary Accumulator

Titan turntables are useful for providing directional change in a conveyor line. Turntables are used for loading and unloading pallets and containers, as well as improving the ergonomics of workstations and for product accumulation.



MODEL 200 TURNTABLE STANDARD SPECIFICATIONS

Diameter	Customer can specify
Drive	1/2 H.P. 230/460/3/60
Table Top	7 gauge
Drive Location	Bottom mount drive
Supports	Fixed structural, min. height 18" top of table
Speed	2.5 RPM fixed

OPTIONS

H.P., variable speed, controls, siderails, air operated, conveyor on top, galvanized, stainless, special paint




www.titanconveyors.com
email • sales@titanconveyors.com

TITAN
CONVEYORS



[Go to Table of Contents](#)

Accessories

Titan offers a wide variety of conveyor accessories. Many are pictured on this page but contact your representative or call the factory for a complete list of optional equipment to make your conveyor or system work for you.




Controls & Motors

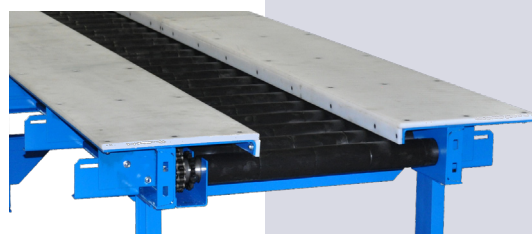

Pins stops - Magnetic detectors - Work tables




Supports


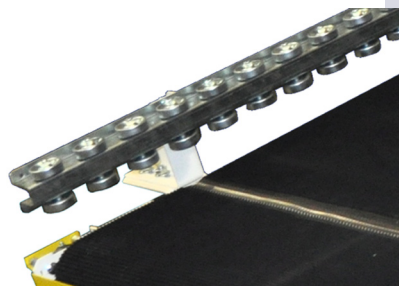


**Siderails -
Fixed & Adjustable**

Accessories



Hoppers & Chutes

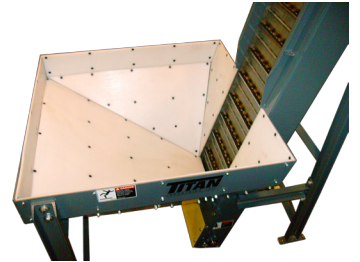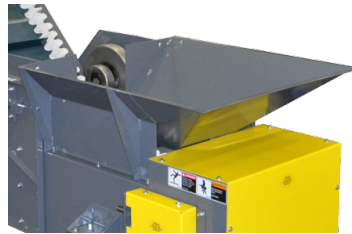

Pallet Centering



Pallet Lifts




Belt Transfers




Chain Transfers



Air Operated Blade Stops

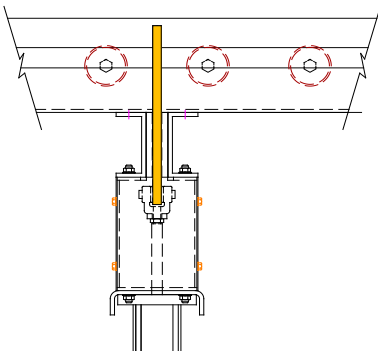

Ceiling Hangers

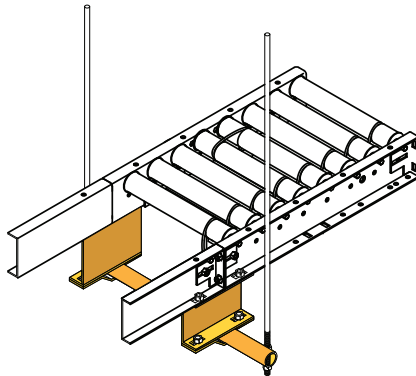

Walkway Plates



Roller Covers



Warranty

(A) Seller warrants that the material in and the workmanship on the equipment manufactured by TITAN will be free from defects at time of shipment. If during the first year from the date of shipment, the Buyer establishes to the seller's satisfaction that any part or parts manufactured by TITAN were defective at the time of shipment, TITAN will, at its own expense, repair or replace (but not install) replacement parts. For a time purpose of this warranty, one year will constitute 2080 hours of operation based on an 8 hour day. Sellers liability under this warranty is limited to replacement parts only and the seller will make no allowance for corrective work done unless agreed to by the seller in writing. Charges for correction of defects by others will not be acceptable, unless so authorized in writing, prior to the work being performed, by an officer of the company. Damage caused by deterioration due to extraordinary wear and tear (including, but not in limitation, use said equipment to handle products of a size, weight and shape or at speeds or methods which differ from information originally provided), chemical action, wear caused by the presence of abrasive materials or by improper maintenance or lubrication or improper storage prior to installation, shall not constitute defects. Failure to install equipment properly shall not constitute defects. Warranty does not cover consumable items. Warranty does not cover belt tracking or adjustment at installation or periodic adjustment that may be required during normal operation. Refer to the maintenance manual for belt tracking instructions.

(B) Seller has made no representation, warranties, or guarantees, expressed or implied, not expressly set forth on above paragraph. Seller shall not be liable hereunder for any consequential damages included but not in limitation, damages which may arise from loss of anticipated profits or production or from increased cost of operation or spoilage of material.

(C) The components used in manufacture of said equipment which were manufactured by others will carry such manufacturers' customary warranty, which seller will obtain for buyer upon request.

(D) No representative of TITAN has been conferred with any authority to waive, alter, vary or add to the terms of warranty state herein, without prior authorization in writing executed by an officer of the company.

(E) The foregoing is in lieu of any and all other warranties, expressed or implied, or those extending beyond the description of the product.

- All specifications are subject to change without notice •
- Drawings are intended for illustration ONLY and are not to scale •



735 Industrial Loop Road
New London, WI 54961
920-982-6600 800-558-3616
FAX: 920-982-7750
sales@titanconveyors.com
www.titanconveyors.com