


MODEL 204 FLOOR TO FLOOR SLIDER BED

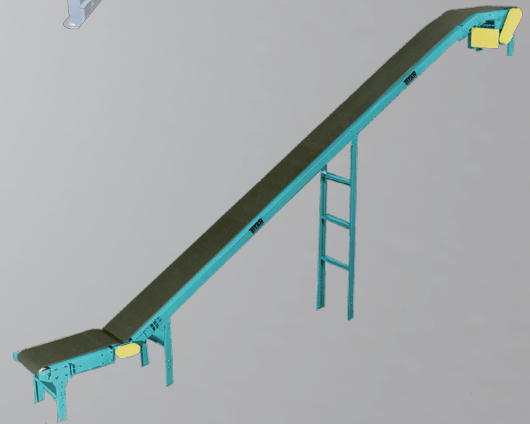

Titans' Model 204 Floor to Floor slider bed adds flexibility to your manufacturing process by allowing you to utilize valuable floor space more effectively. The double nose over with bend rollers allows a smooth transition of the product from incline to horizontal thus protecting fragile products. The Model 204 uses a 4" diameter crown faced rubber lagged drive pulley with a rugged 4" deep formed 12 gauge box style frame. Adjustable "H" type supports or ceiling hanger brackets are furnished as standard equipment. A center drive and take-up can be added for reversing applications. The design of all Titan conveyors allows you to add components easily to achieve a completely integrated material handling system.

MODEL 204 FLOOR TO FLOOR SLIDER BED CONVEYOR

	Standard	Options
Belt Widths	12", 14", 16", 18", 20", 24", 30", 36"	4", 6", 8", 10"
Lengths	5' min. to 40' max.	3' min to 50' max
Belt Type	Rubber rough top	Gum rubber
Drive	1/2 HP 230/460/3/60	3/4, 1, HP, 115/230/1/60, TEFC, wahsdown, severe duty, inverter duty, brake motor
Drive Pulley	4" dia. crowned, rubber lagged	
Frame	4" deep formed 12 ga.	

Optional


H.P., drive location, speed, fixed or variable speed, controls, power feeder, belt type, center drive & take-up, transfer rollers, bolt-on end stop, belt scrapper, galvanized, stainless, siderails, supports, casters, other belt types, siderail skirting, special paint

Many other options available, consult factory representative

NOTE: Specifications subject to change without notice

MODEL 204

FLOOR TO FLOOR SLIDER BED

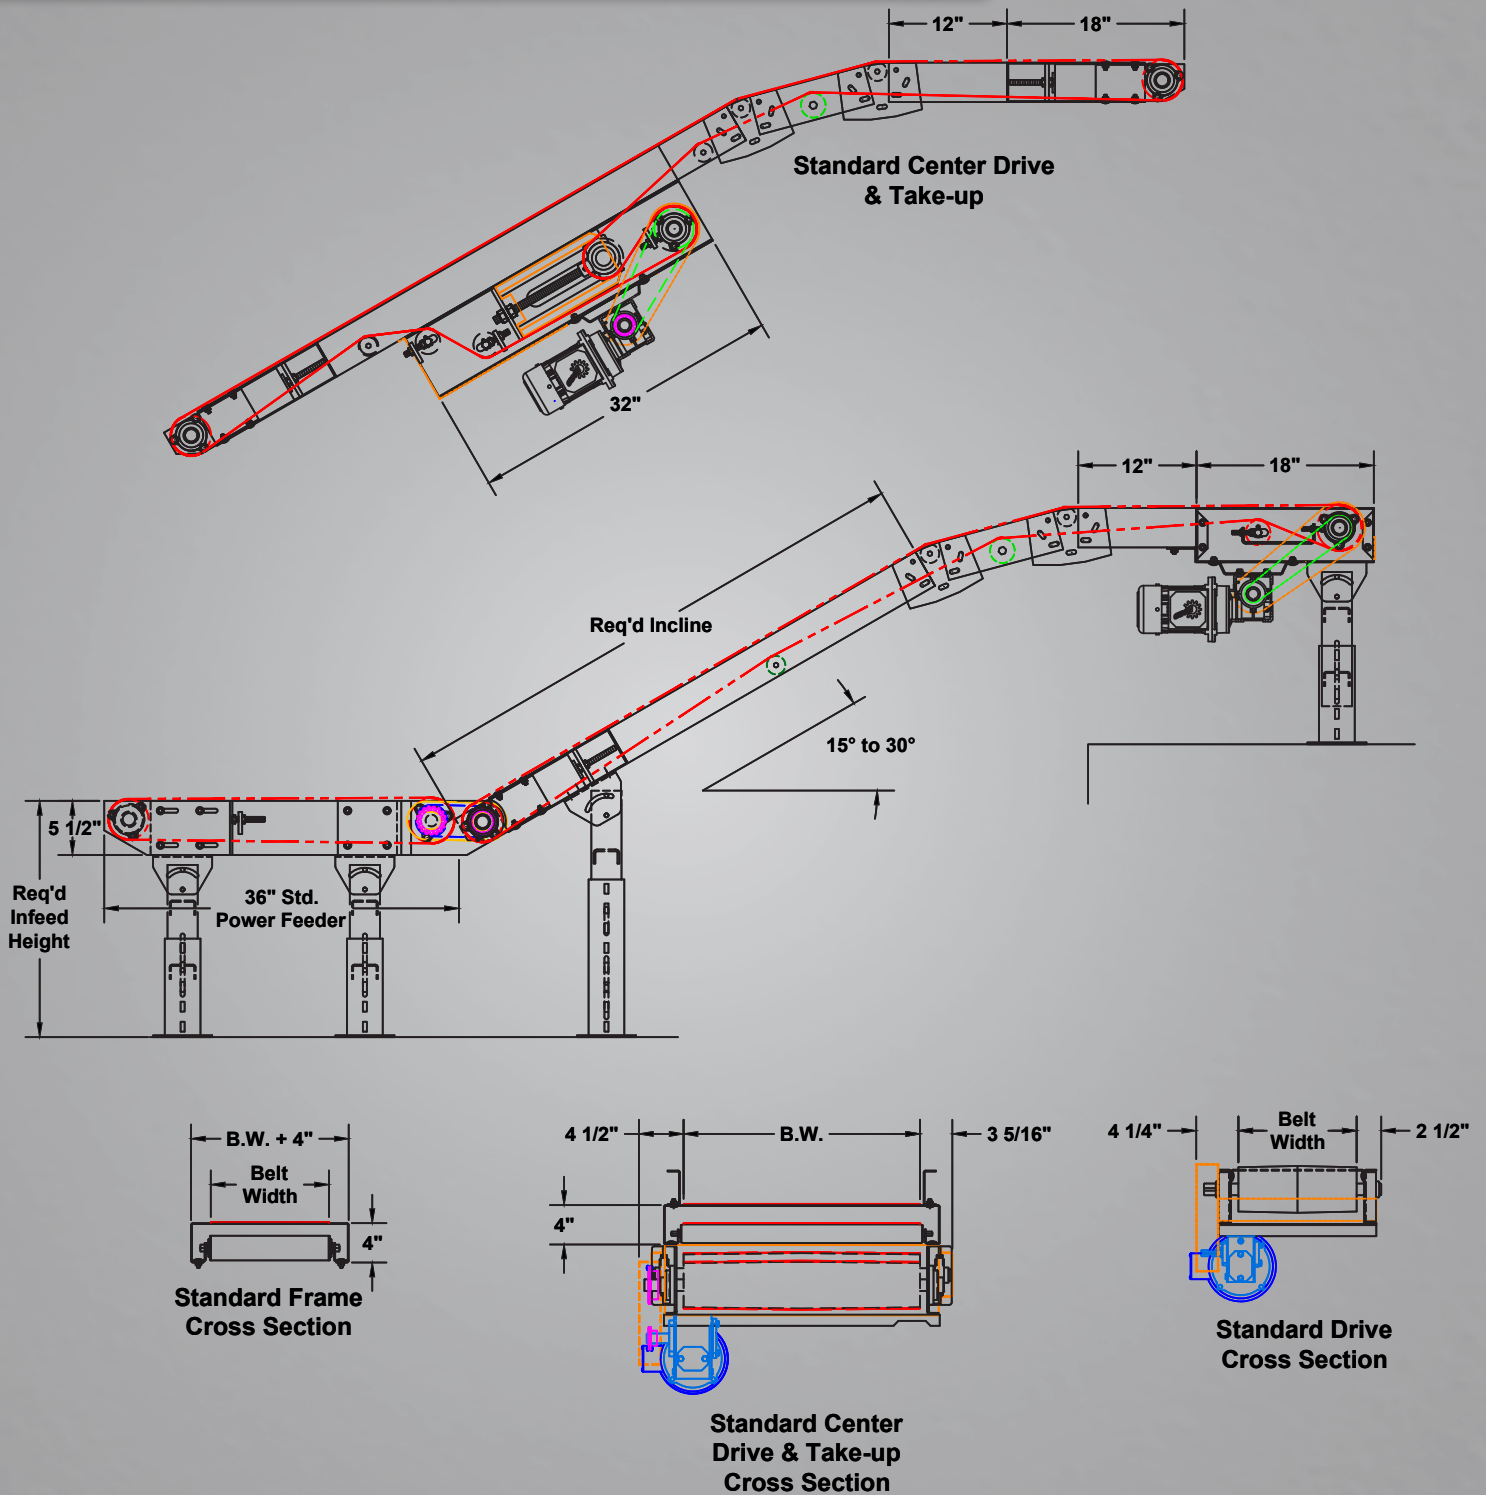

TITANTM
CONVEYORS

735 Industrial Loop Road
New London, WI 54961

800-558-3616
920-982-6600

sales@titanconveyors.com
titanconveyors.com