


MODEL 340 SIDEWALL CONVEYOR




Profiles Available


TYPE 1




TYPE 2



TYPE 3



TYPE 4




When your application calls for a conveyor that requires a horizontal section, incline section, horizontal configuration and a steel belt cannot be used, then turn to the **Titan Model 340 Sidewall Conveyor**. This unit can also be supplied in other configurations. The sidewall belt is used for handling a wide variety of material from bulk powders to parts to an abrasive lumpy material. Standard construction is mild steel but stainless steel construction and white belts are available for handling food products. The unit is available in various belt widths, angles of incline, lengths of straight sections and numerous sidewall heights, cleat heights and cleat centers. Further details and quotations supplied upon request.

MODEL 340 SIDEWALL CONVEYOR		
	Standard	Options
Belt Width	Selected to suit application	
Length	Determined by application	
Belt Type	Selected to suit application	Food grade belting
Drive	1/2 HP 230/460/3/60	3/4, 1, 1-1/2, 2 HP, 115/230/1/60, TEFC, washdown, sever duty, inverter duty, brake motor
Curves	30°, 45°, 60° curves available	Other angles available
Frame	Formed 12 gauge	
OPTIONAL		
Stainless steel construction, siderails, bolt-on bottom pans, belt thumper at discharge, top covers, casters, e-stop with pull cord – consult factory		


NOTE: Specifications subject to change without notice

MODEL 340


SIDEWALL CONVEYOR

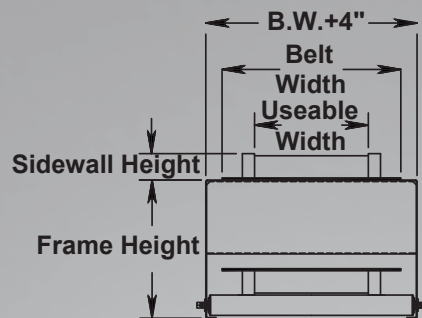


Section C-C

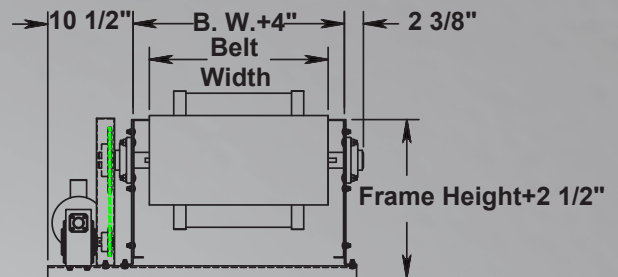


Section D-D



Section B-B



Section A-A

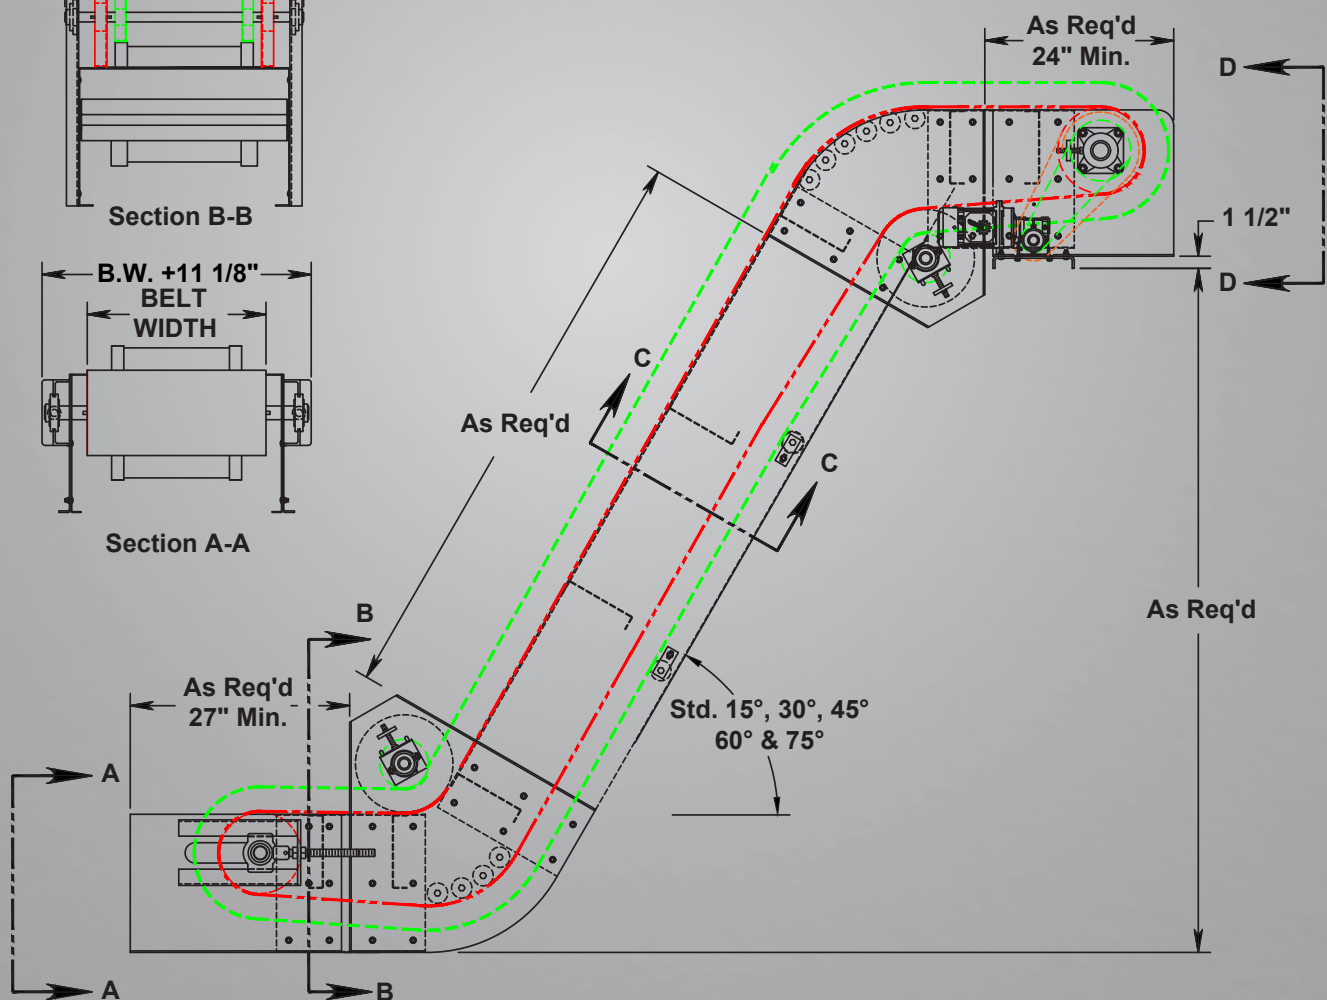

TITANTM

CONVEYORS

735 Industrial Loop Road
New London, WI 54961

800-558-3616
920-982-6600

sales@titanconveyors.com
titanconveyors.com