


MODEL 404

BELT-DRIVEN LIVE ROLLER CONVEYOR



The Titan **Model 404 Belt-Driven Live Roller Conveyor** features all of the time proven design features that you've come to expect from Titan. Standard Features include 4" diameter drive and tail pulleys, grease sealed industrial 3 bolt flange bearings, heavy duty formed 12 gauge frame and a P.V.C. drive belt. The Model 404 uses 1.9 diameter x 16 gauge rollers with 7/16" spring loaded hex shaft and grease-packed bearings. Standard roller centers are 6" with optional 3" and 4 1/2" centers. Compression rollers are also 1.9 x 16 gauge and mounted on 6" centers. Standard between frame widths start at 13" and range to 41".

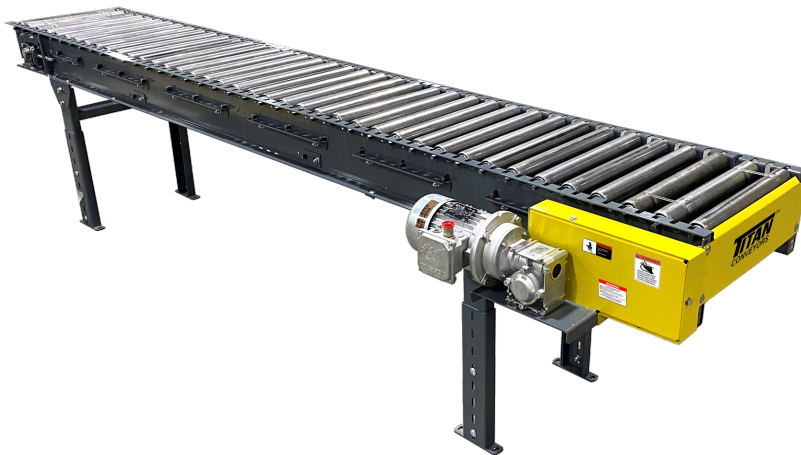

BELT DRIVEN LIVE ROLLER CONVEYOR SPECIFICATIONS

	Standard	Options
BF Dimensions	13", 16", 19", 22", 25", 28", 31", 34", 37", 41"	Specify
Lengths	3' Min. to 100' Max.	
Roller Size	1.9" x 16 ga. with 7/16" hex axle	
Roller Centers	6"	3", 4-1/2"
Belt Type	PVC 120	
Frame	6 1/2" deep formed 12 ga.	
Drive	1/2 H.P. 230/460/3/60	3/4, 1, 1-1/2, 2 HP , TEFC, severe duty, inverter duty, brake motor
Drive Pulley	4" dia. crown faced rubber lagged	


OPTIONAL

Belt Type, Drives - Fixed speeds-specify speed req., variable speed with DC motor and SCR controller or AC inverter, Motor , Controls, Internal take-up, Center drive, 1", 3 1/2", 6", 8". 12" side rails available, Adjustable side rails, Casters - 4' or 6" rigid, Side mount drive, Knee braces/ceiling hangers, Bolt on bottom pans, Rollers centers, Transfer roller, End stop, Accumulation, Galvanized or Stainless steel construction

NOTE: Specifications subject to change without notice

MODEL 404

BELT-DRIVEN LIVE ROLLER

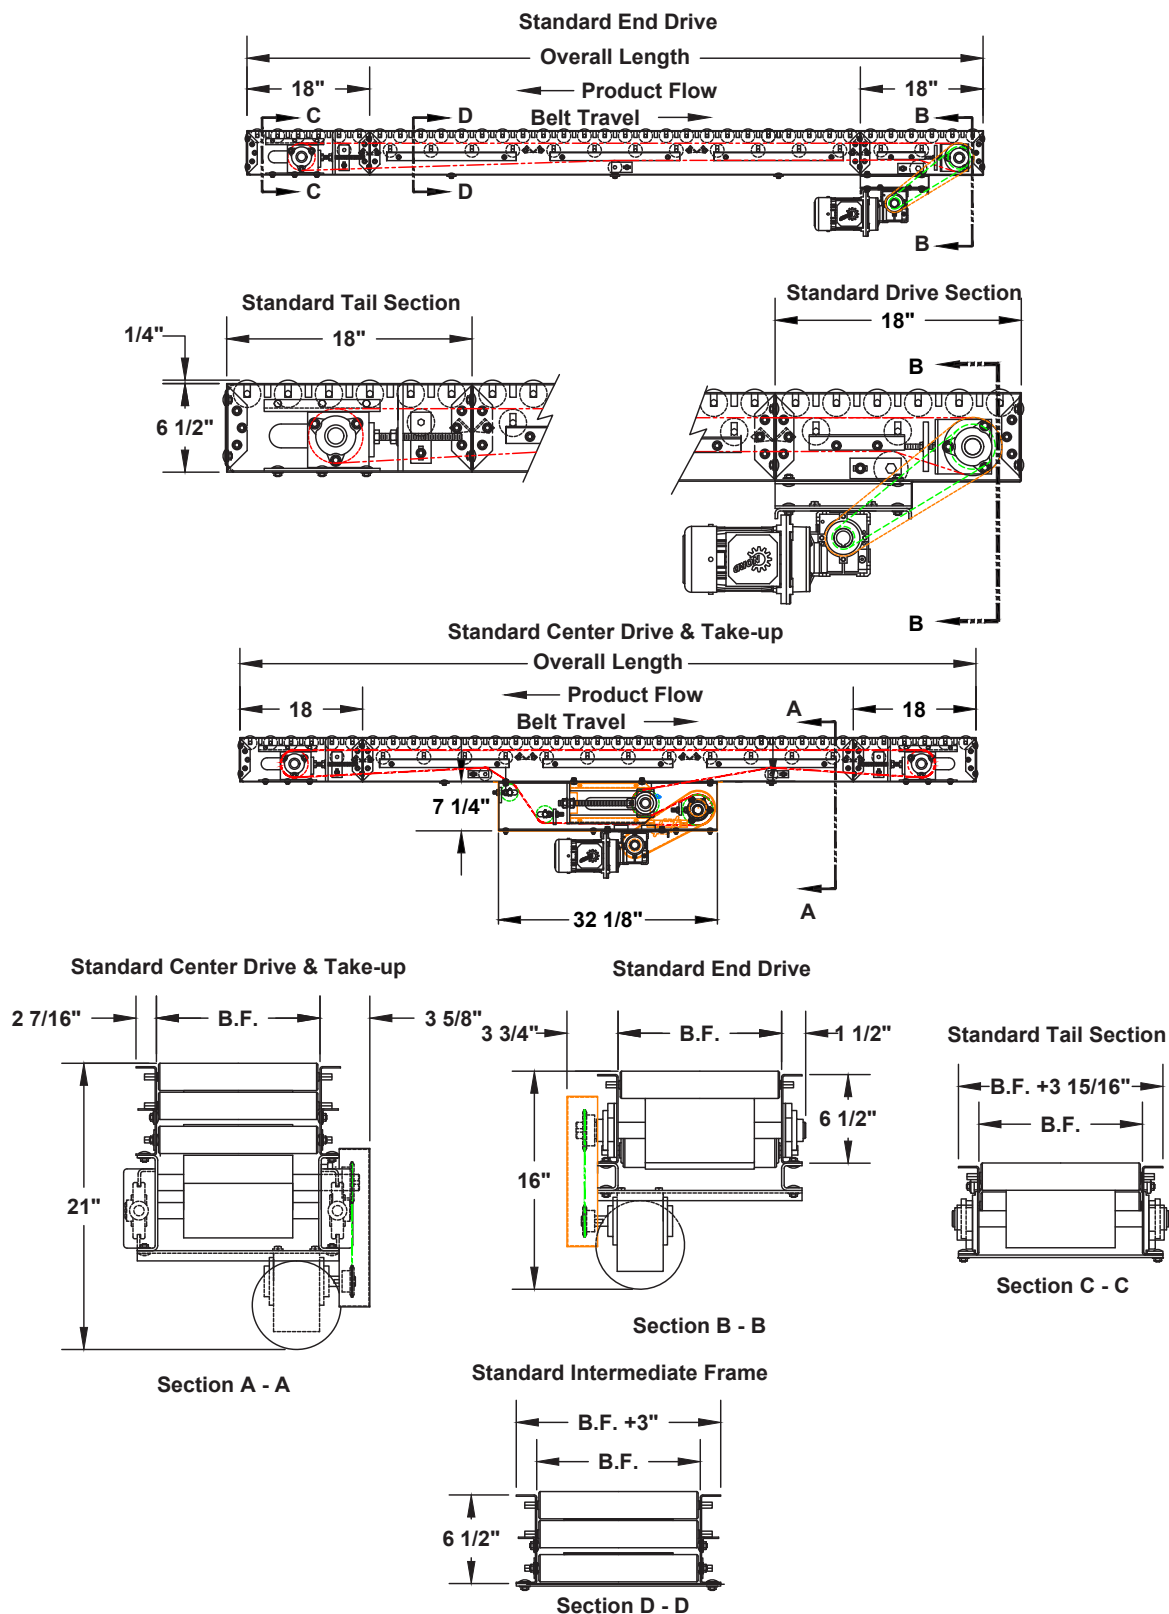

TITANTM
CONVEYORS

735 Industrial Loop Road • New London, WI 54961-9612
920-982-6600 • Fax 920-982-7750 • Toll Free 800-558-3616
Website: www.titanconveyors.com • Email: sales@titanconveyors.com