MODEL 526 CHAIN DRIVEN LIVE ROLLER




Titans' **Model 526** is designed for handling pallets, skids, drums. The unit incorporates a number 50 chain with a roll-to-roll drive, with #60 chain optional for heavier loads. The frame is heavy formed 7 gauge construction with a one piece chain guard. Rollers are 2-5/8" diameter x 7 gauge (**580 lb. capacity**). The standard drive is a 3/4 H.P. with 30 F.P.M. roller speed. A wide range of standard effective widths are available. Standard roller spacing is 5", with 2-13/16", 3-19/32", 4-3/8", and 5-15/16" centers available with #50 chain. Floor supports are optional. The Model 526 comes in lengths to suit with a minimum length of 4' long. Consult the factory for further details.



Special 526 with 3 strand chain transfer


	Standard	Options
Effective Widths	15" to 80"	Specify
Lengths	5' min.	3' min max. per application
Roller Size	2 5/8" dia. x 7 ga. with 11/16" hex shaft	
Roller Center	5"	2-13/16", 3-19/32", 4-3/8", 5-15/16", 10"
Frame	Formed 7 ga.	
Drive	3/4 H.P. 230/4603/60	1, 1-1/2, 2 H.P. 115/230/1/60, 575/3/60, severe duty inverter duty, brake motor
Chain Drive	#50	#60
	Optional	
struction, H. P. , Sp let jack plates for sid	eeds, Variable speed, Controls, Coated rollers, de or end load, "C" Face brake and Fixed end st	ve locations: as needed, Galvanized or stainless con- Paint, 2, 3 or 4 strand chain transfers, Pallet lifts, Pal- op, Pallet pusher, Walk plates,Rollers set low, UHMW operated blade stop, Supports - 6" @ #8.2 structural


MODEL 526 CHAIN DRIVEN LIVE ROLLER CONVEYOR

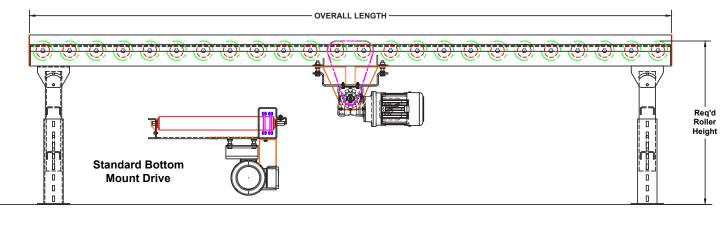




STANDARD SIDE MOUNT DRIVE









DOUBLE DRIVE GUARD (STANDARD CENTERS - 2 13/16")



735 Industrial Loop Road • New London, WI 54961-9612 920-982-6600 • Fax 920-982-7750 • Toll Free 800-558-3616 Website: www.titanconveyors.com • Email: sales@titanconveyors.com