

MODEL 118 TROUGHED BELT CONVEYOR



The Model 118 troughed belt conveyor is designed as a cost competitive medium duty bulk conveyor. The standard 4" deep formed 12 gauge frame allows for reduced total weight and yet the rigidity needed for medium duty applications. Excellent design for transporting loose parts or bulk materials. Bottom, top or center drive available.



MODEL 118 SLIDER BED TROUGH CONVEYORS

	Standard	Options
Belt Widths	6" to 72"	Other widths available
Lengths	5' min. to 40' max.	3' min. to 50' max.
Belt Type	PVC 120 Black	Food grade
Drive	1/2 H.P. 230/460/3/60	3/4, 1, 1-1/2, 2 HP, 115/230/1/60, TEFC, washdown, severe duty, inverter duty, brake motor
Drive Pulley	8" dia. crowned rubber lagged - 4" tail pulley	6" tail pulley for widths over 54"
Frame	4" deep formed 12 g.a.	


OPTIONAL

H.P., drive location, speed, fixed or variable speed, controls, belt widths, belt type, center drive & take-up, galvanized, stainless, siderails, supports, casters, other belt types, siderail skirting, belt scrapper, machined and balanced pulleys for high speed, discharge housing, e-stop with pull cord, special paint


Many other options available, consult factory representative

NOTE: Specifications subject to change without notice


MODEL 118 TROUGHED BELT CONVEYOR

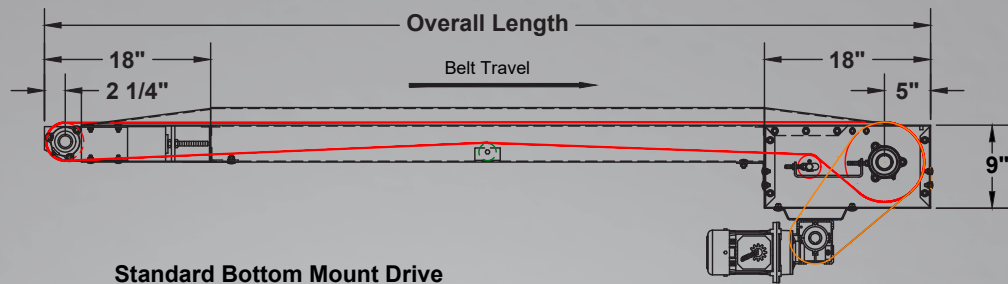



Standard Bottom Mount Drive

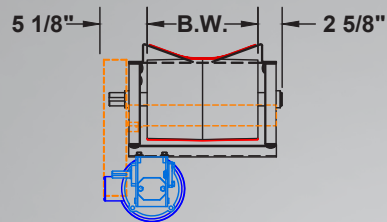

Standard Drive Cross Section

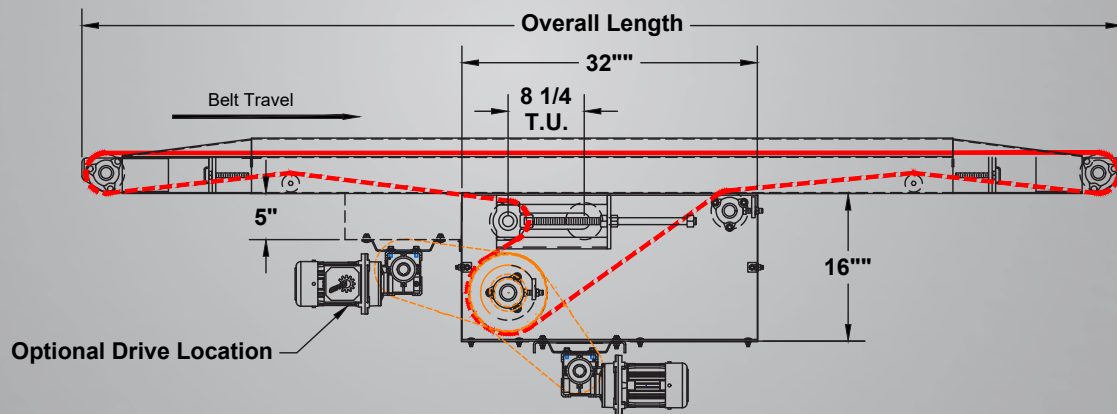

Standard Center Drive & Take-Up

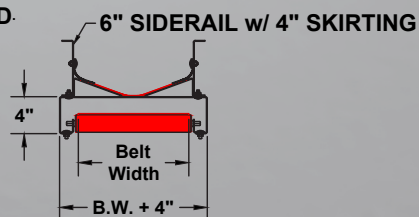

TITANTM
CONVEYORS

735 Industrial Loop Road
New London, WI 54961

800-558-3616
920-982-6600

sales@titanconveyors.com
titanconveyors.com